



RubINETterie Italiane Velatta SpA

————— since 1950 —————

>> YOU need the BEST

GLadio


Series



RIV 122

Knife gate valve
 with double-acting pneumatic jack and position
 sensors
 with O-ring gaskets
 flanges PN 10

>> Tech drawings and tables

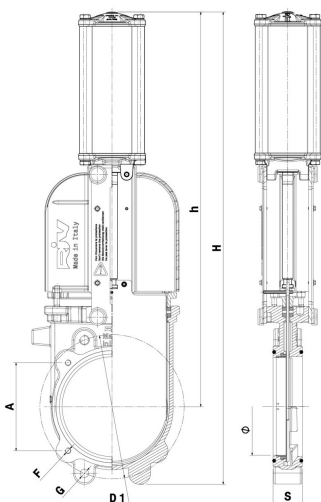

DN	Codice	Ø	H	h	S	F	A	D1	G	PN	KG	P/box
4"	050122000016	100	664	558	50	M12	150	180	M16	10bar - 145psi	18,654	1
5"	050122000018	125	744	624	50	M12	150	210	M16	10bar - 145psi	19,973	1
6"	050122000019	150	814	680	60	M12	150	240	M20	10bar - 145psi	23,536	1
8"	050122000020	200	967	808	60	M12	180	295	M20	8bar - 120psi	29,077	1
10"	050122000021	250	1222	1025	70	-	-	350	M20	7bar - 100psi	58,783	1

>> Advantages

GLADIO is a gate valve where, in addition to the aesthetic side, our engineers have managed the particular features and details, trying not to leave anything to chance.

In order to be able to cover a wide range of use, GLADIO is standard equipped with double flanging, one for the fitting with square flange for agricultural use of standard dimensions and a DIN PN 10 one, or ANSI 150 for the American market.

Due to its special design feature, GLADIO is a gate valve called "anti-clogging" and can be installed in any position.

Large-size self-cleaning seat.

Security: GLADIO has a robust protective casing, which completely isolates the moving parts of the gate valve.

Set-up for manoeuvre lever attachments on the valve body.

Stainless steel screws and tie rods to prevent corrosion.

Equipped with an open/closed position indicator.

Simple maintenance: all parts, when worn out, are easily replaceable.

Complies with the Directive 97/23/CE (**PED**).


>> Approvals



>> Technical data

RIV 120

Nr.	Cod.
2	Riv 9818
3	Riv 9845
4	Riv 9845
5	Riv 9859
6	Riv 9836
7	Riv 9836
16	Riv 9829
21	Riv 9840
24	Riv 9844
25	Riv 9854

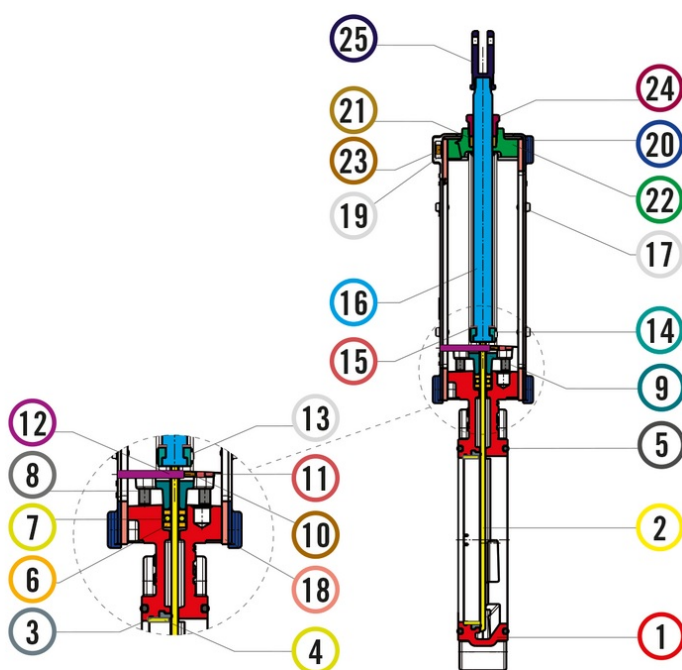

Materials				
1	Body	Cast iron	EN-GJL-250	
2	Blade	Stainless steel	AISI 304	
3	Ring	Stainless steel	AISI 304	
4	Gasket	HNBR		
5	O-Ring	NBR		
6	Gland packing	Fibre		
7	Gasket	NBR		
8	Stud	Stainless steel	AISI 304	
9	Gland packing box	Cast iron	EN-GJL-250	
10	Washer	Stainless steel	AISI 304	
11	Nut	Stainless steel	AISI 316	
12	Position indicator	Steel		
13	Screw	Stainless steel	AISI 304	
14	Blade connection	Brass	CW617N	
15	Nut	Steel		Zinc-plated
16	Stem	Brass	CW614N	
17	Screw	Stainless steel	AISI 304	
18	Clamp	Steel		Zinc-plated
19	Screw	Stainless steel	AISI 304	
20	Casing	PP		
21	Tow packing	Fibre		
22	Cap	Cast iron	EN-GJL-250	
23	Washer	Stainless steel	AISI 304	
24	Stuffing-box	Brass	CW614N	
25	Fork	Brass	CW617N	

Connection

Square flange / PN 10 - ANSI 150

Limit

-20°C (without liquid) +90°C

>> Riv 165 Pneumatic jack

Notes

MINIMUM OPERATING PRESSURE:

4", 5", 6", 8", 10" = 6 Bar (87 Psi)

MAXIMUM OPERATING PRESSURE:

10 Bar (145 Psi)

Notes

The max. working pressure (PN) means at a room temperature of about 23°C.

Notes

Please use flanges EN1092-1 type 1 (Welding Neck)

Notes

Attenzione: I sensori standard NON sono idonei all'installazione in ambiente ATEX

>> More Products



RIV 120

Knife gate valve
 with O-ring gaskets
 flanges PN 10



RIV 119

Knife gate valve without upper part
 with O-ring gaskets
 flanges PN 10



RIV 121

Knife gate valve
 with handwheel
 with O-ring gaskets
 flanges PN 10



RIV 123

Knife gate valve
 with double-acting pneumatic jack
 with O-ring gaskets
 flanges PN 10



RIV 124

Knife gate valve
 with double-acting hydraulic jack
 with O-ring gaskets
 flanges PN 10



RIV 125

Knife gate valve
 with two double-acting hydraulic
 jacks
 with O-ring gaskets
 flanges PN 10



RIV 130

Knife gate valve
 with O-ring gaskets
 flanges ANSI 150



RIV 131

Knife gate valve
 with handwheel
 with O-ring gaskets
 flanges ANSI 150



RIV 132

Knife gate valve
 with double-acting pneumatic jack
 and position sensors
 with O-ring gaskets
 flanges ANSI 150



RIV 133

Knife gate valve
 with double-acting pneumatic jack
 with O-ring gaskets
 flanges ANSI 150



RIV 134

Knife gate valve
 with double-acting hydraulic jack
 with O-ring gaskets
 flanges ANSI 150