



PUBBLICITÀ64

indoor e outdoor advertising

LUMINA

www.pubblicita64.com



PUBBLICITÀ64

indoor e outdoor advertising

SIGNS

LUMINA

Light up your business

We are the perfect partner for your light communication. Thanks to our engineering know-how we are able to highlight textures and surfaces, providing a unique environment thanks to the indirect light effect.

Widely used for the production of signs, box letters or backlit totems, the products of the Luminia line will make your image shine out functionally and give your spaces maximum radiance, saving energy, all for the benefit of the environment






Direct light





EXTRA MINI

Operating voltage	DC 12V
Consumption	0.3 W
Light angle	120°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 30 to 50 mm
Module step	85 mm
Max connectable	50 pcs
Packaging	200 pcs
Warranty	5 years
Certifications	CE & Rohs



Small and medium-sized boxed letters. Backlighting of single-sided signs from 30 to 50 mm.

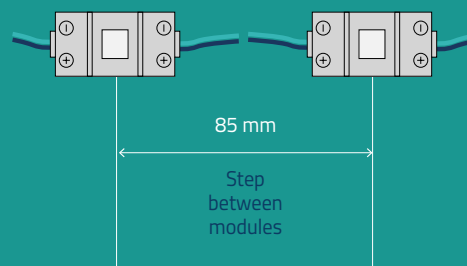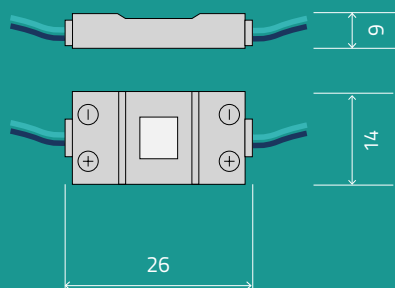

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-2L-REG-PW	White	6500K	90	0.6	0.05	DC 12V




Direct light





ONE MINI

Single-sided

Operating voltage	DC 12V
Consumption	0.48W
Light angle	170°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 30 to 80 mm
Modules step	86 mm
Max connectable	40 pcs
Packaging	200 pcs
Warranty	5 years
Operating voltage	CE & Rohs




Small and medium-sized boxed letters. Backlighting of single-sided signs from 30 to 80 mm.

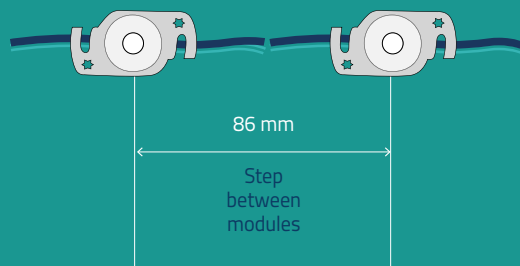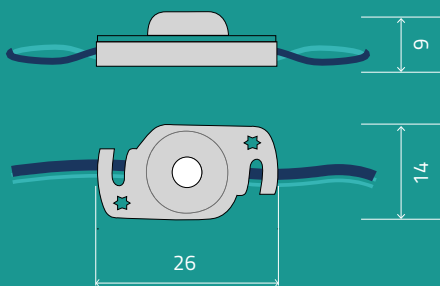

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-1L-MINI-PW	White	6500K	40	0.48	0.04	DC 12V
LU-1L-MINI-CW	Cool White	10000K	40	0.48	0.04	DC 12V


Direct light

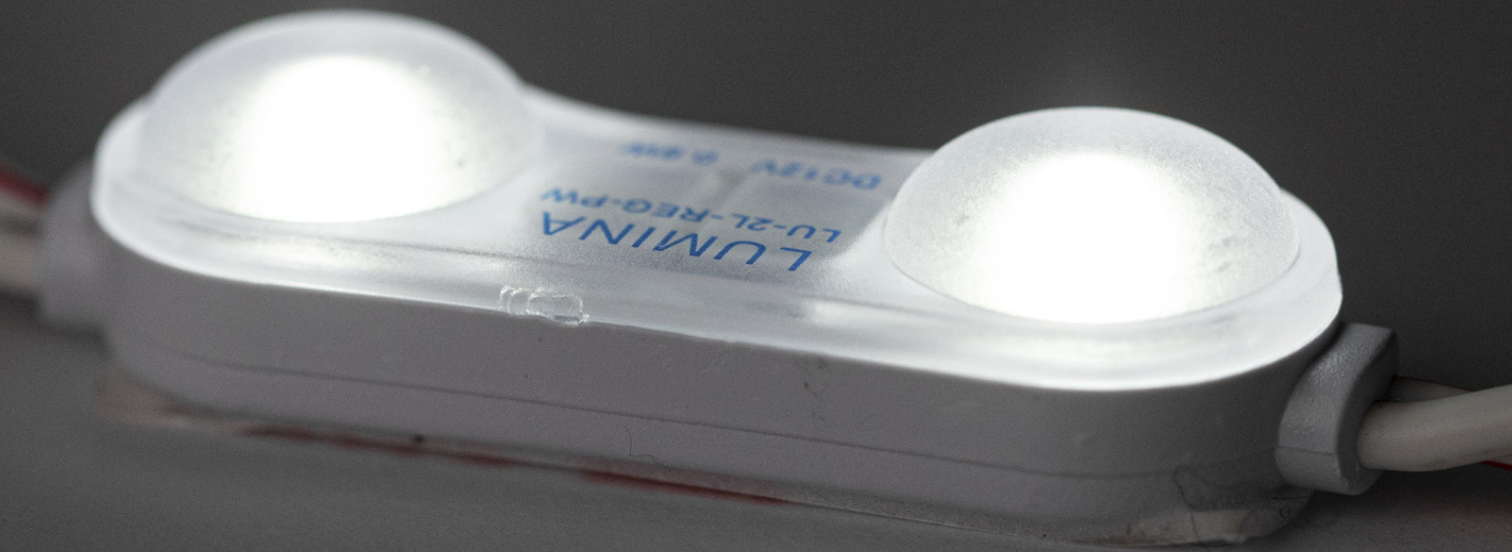


BI REGULAR

Single-sided

Operating voltage	DC 12V
Consumption	0.6W
Light angle	170°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 50 to 120 mm
Modules step	165,8 mm
Max connectable	40 pcs
Packaging	200 pcs
Warranty	5 years
Certifications	CE & Rohs




Medium sized boxed letters.
Backlighting of single-sided signs
from 50 to 120 mm.

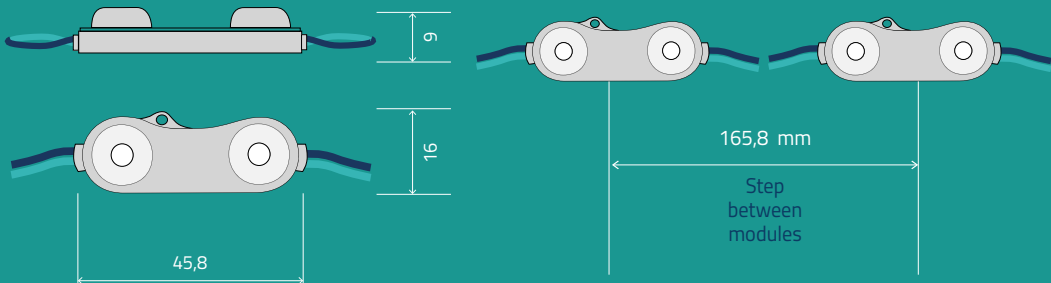

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-2L-REG-PW	White	6500K	90	0.6	0.05	DC 12V
LU-2L-REG-CW	Cool White	10000K	90	0.6	0.05	DC 12V
LU-2L-REG-R	Red	620nm	80	0.6	0.05	DC 12V
LU-2L-REG-G	Green	520nm	80	0.6	0.05	DC 12V
LU-2L-REG-B	Blue	465nm	80	0.6	0.05	DC 12V




Direct light

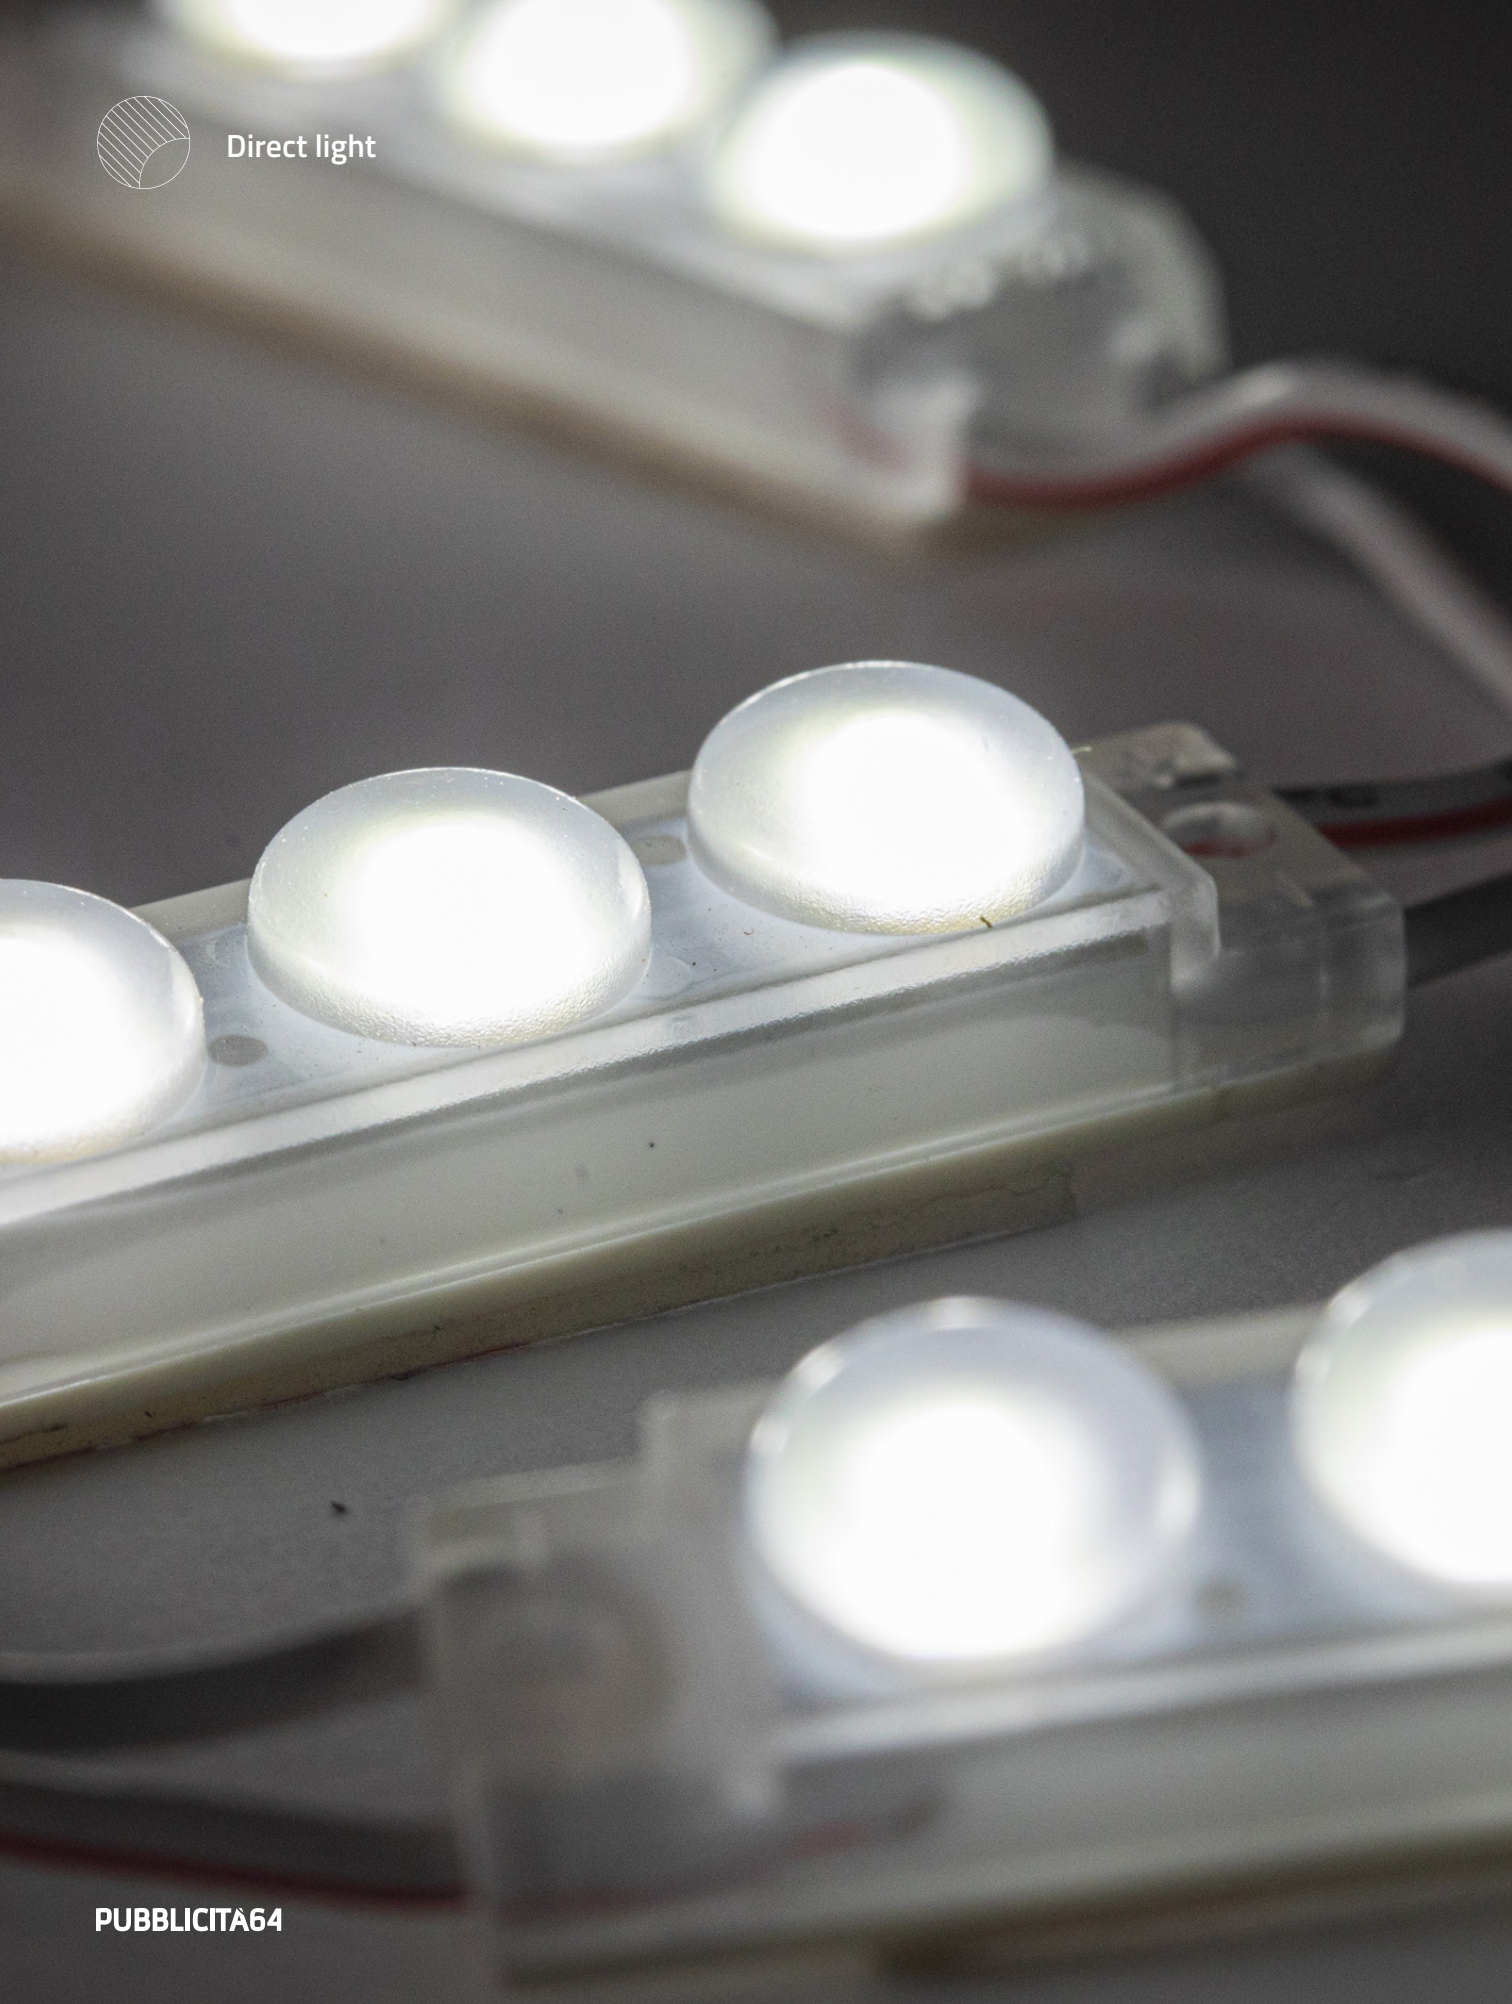


TRIS MINI

Single-sided

Operating voltage	DC 12V
Consumption	0.48W
Light angle	160°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 50 to 120 mm
Modules step	101 mm
Max connectable	20 pcs
Packaging	200 pcs
Warranty	5 years
Certifications	CE & Rohs



Small and medium-sized boxed letters.
Backlighting of single-sided signs
from 50 to 120 mm.

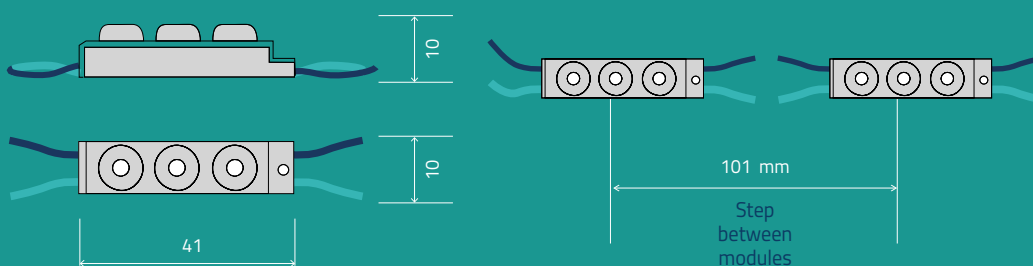

Codice	Colore	Temperatura colore	Lumen (lm)	Consumo (W/pc)	Corrente (A/pc)	Tensione d'esercizio
LU-3L-MINI-PW	White	6500K	60	0.48	0.04	DC 12V
LU-3L-MINI-CW	Cool White	10000K	60	0.48	0.04	DC 12V




Direct light





TRIS REGULAR

Single-sided

Operating voltage	DC 12V
Consumption	0.9W
Light angle	170°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 60 to 150 mm
Modules step	211,5 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs



Medium sized boxed letters.
Backlighting of single-sided signs
from 60 to 150 mm.

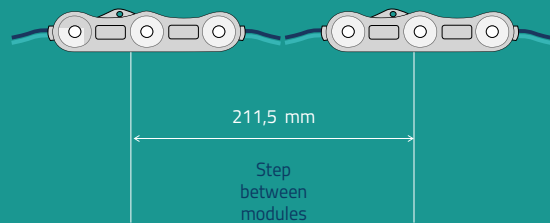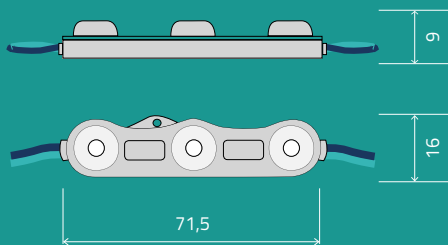

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-3L-REG-PW	White	6500K	135	0.9	0.075	DC 12V
LU-3L-REG-CW	Cool White	10000K	135	0.9	0.075	DC 12V
LU-3L-REG-R	Red	620nm	135	0.9	0.075	DC 12V
LU-3L-REG-G	Green	520nm	135	0.9	0.075	DC 12V
LU-3L-REG-B	Blue	465nm	135	0.9	0.075	DC 12V




Direct light





Q REGULAR

Single-sided

Operating voltage	DC 12V
Consumption	1.4W
Light angle	170°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	from 80 to 300 mm
Step modules	285,6 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs

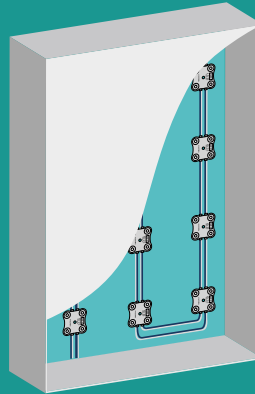

Medium sized boxed letters.
Backlighting of single-sided signs
from 80 to 300 mm.

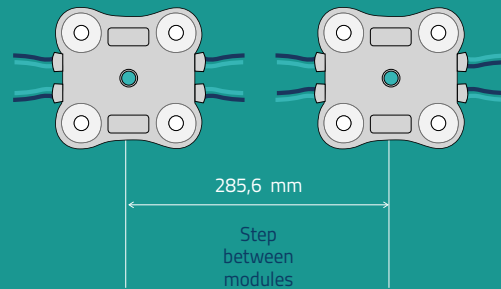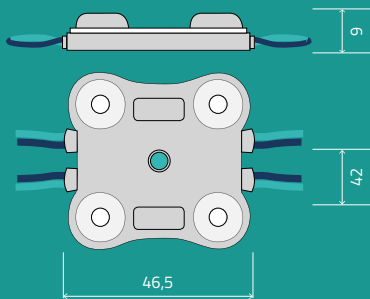

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-4L-REG-PW	White	6500K	180	1.4	0.12	DC 12V
LU-4L-REG-CW	Cool White	10000K	180	1.4	0.12	DC 12V
LU-4L-REG-R	Red	620nm	150	1.4	0.12	DC 12V
LU-4L-REG-G	Green	520nm	150	1.4	0.12	DC 12V
LU-4L-REG-B	Blue	465nm	150	1.4	0.12	DC 12V




Direct light





ONE REGULAR

Single-sided

Operating voltage	DC 12V
Consumption	1.5W
Light angle	160°
IP degree	IP 65
Operating temperature	-20°C +55°C
Recommended depth	from 80 to 300 mm
Step modules	253 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs

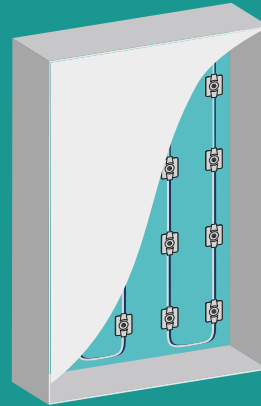


Medium sized boxed letters.
Backlighting of single-sided signs
from 80 to 300 mm.

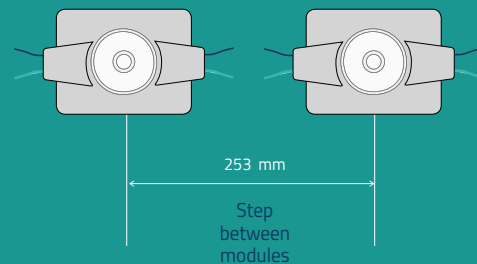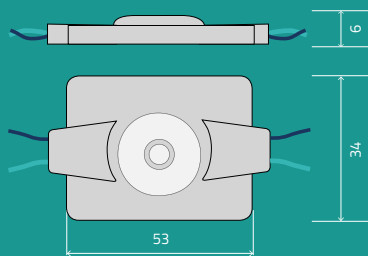

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-1L-REG-PW	White	6500K	150	1.5	0.125	DC 12V
LU-1L-REG-CW	Cool White	10000K	150	1.5	0.125	DC 12V




Direct light

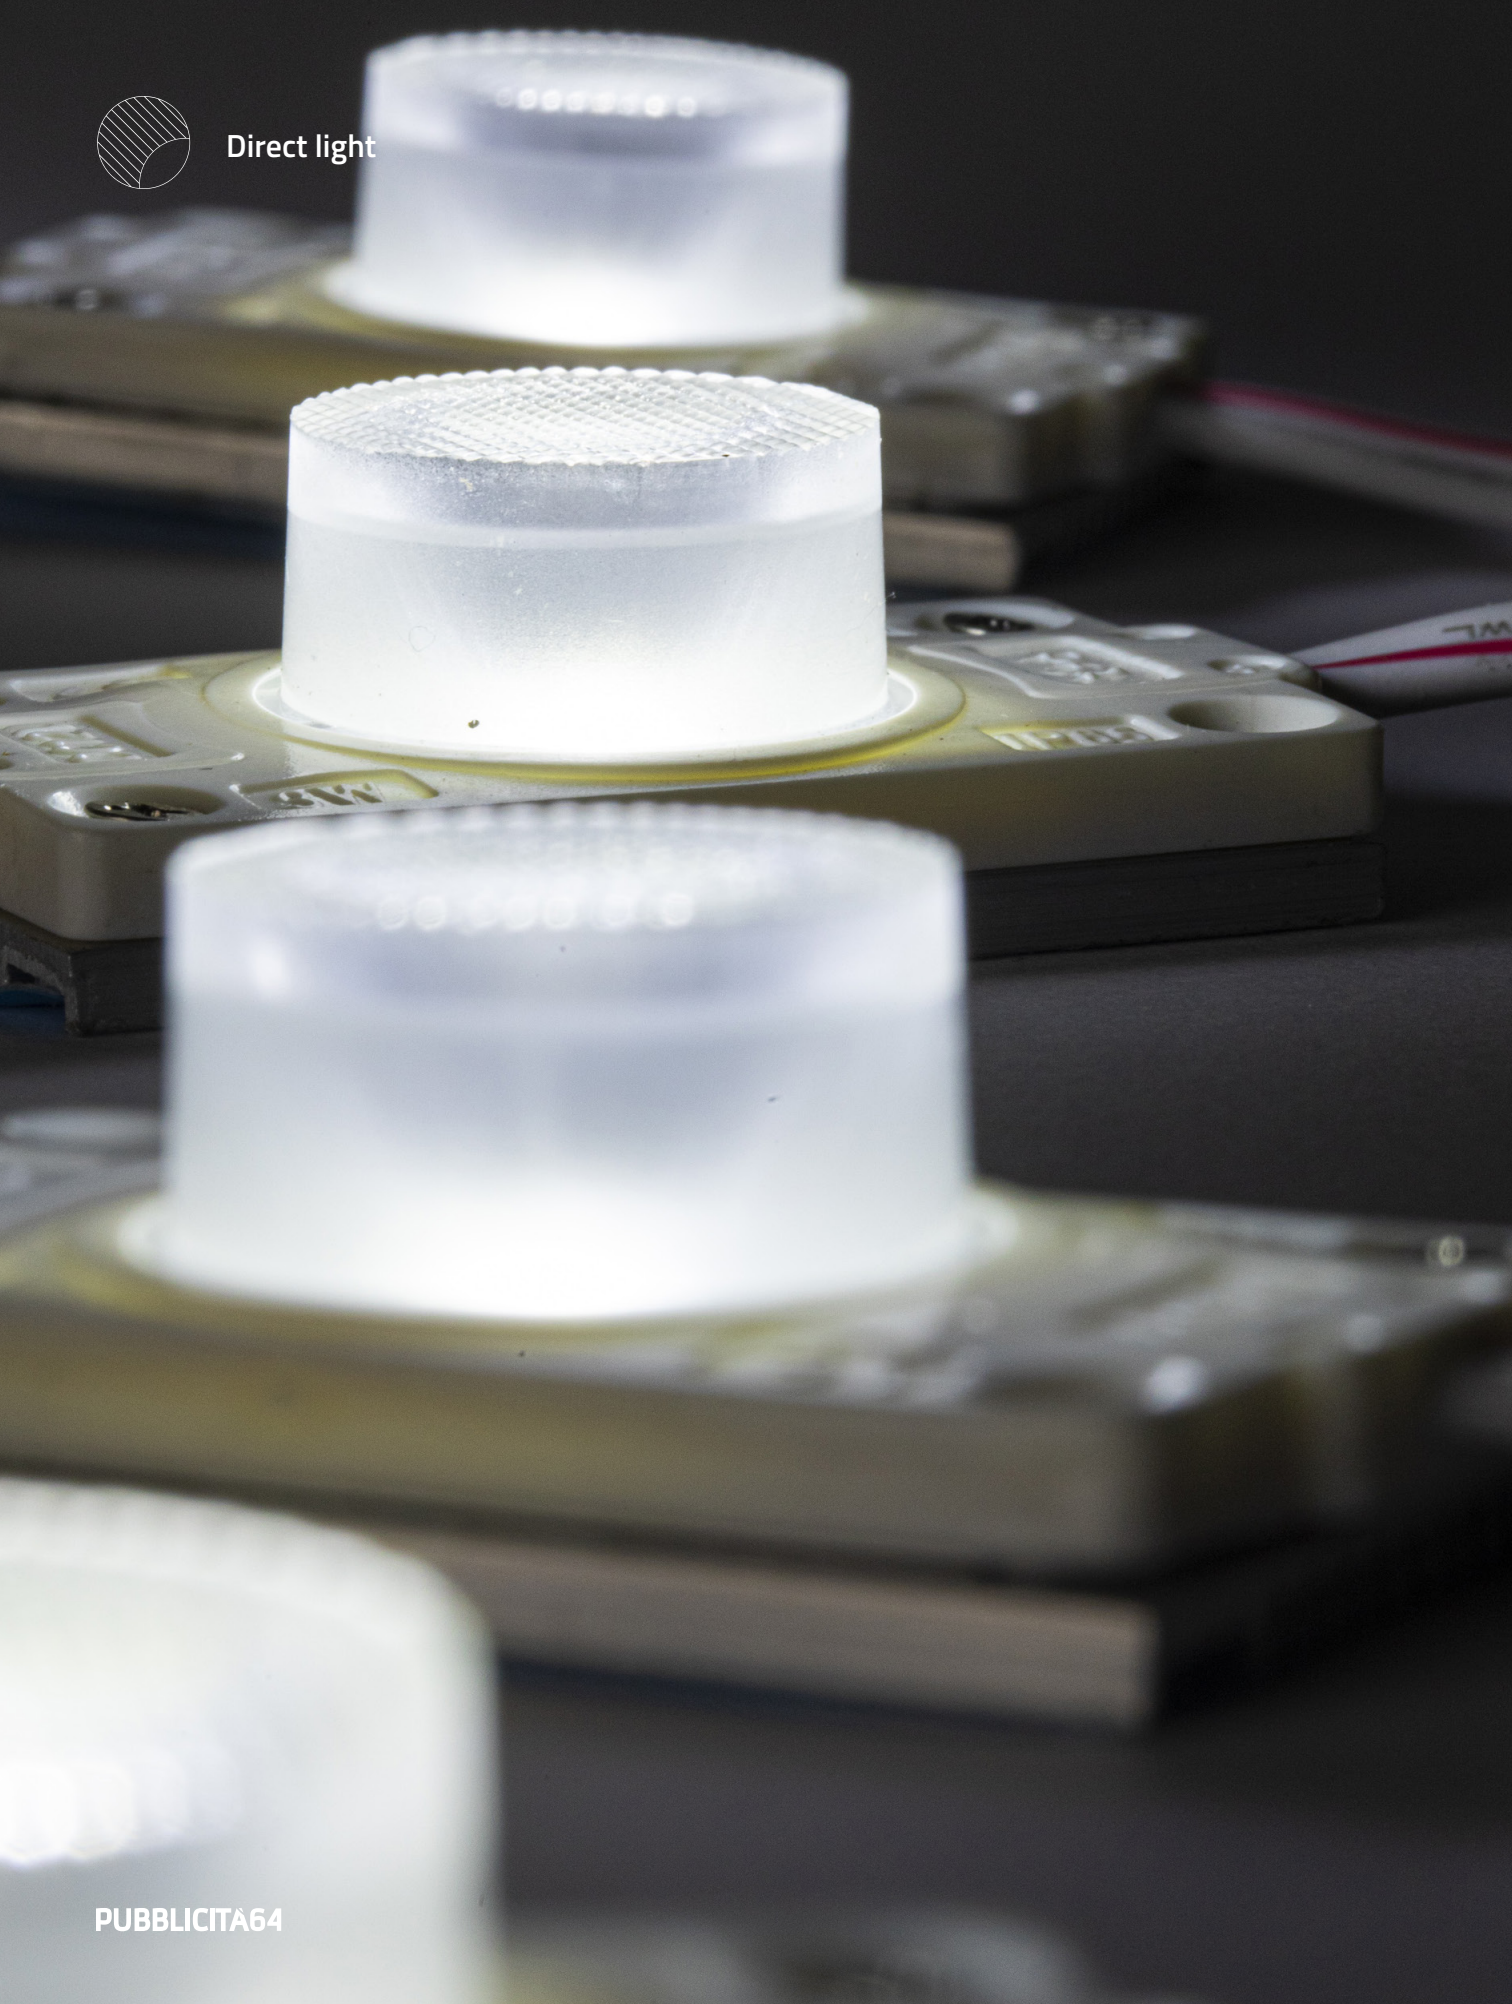



ONE EXTRA

Double-sided

Operating voltage	DC 12V
Consumption	3W
Light angle	45°
IP degree	IP 67
Operating temperature	-20°C +55°C
Recommended depth	up to 3000 mm
Step modules	204 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs

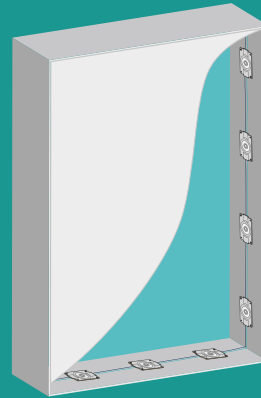

Double-sided boxes and totem up to 3000 mm

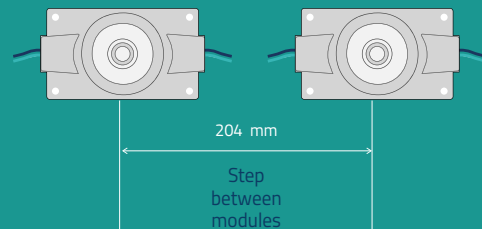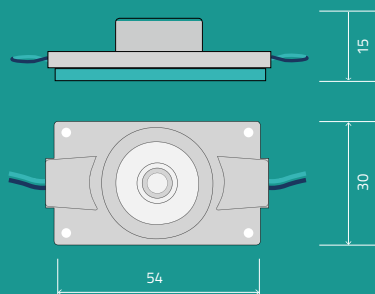

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-1L-EXTRA-3W	White	6500K	200	3	0.25	DC 12V



Direct light




PUBBLICITA64


ONE PLUS

Double-sided

Operating voltage	DC 12V
Consumption	2W
Light angle	45°
IP degree	IP 65
Operating temperature	-20°C +55°C
Recommended depth	up to 4000 mm
Step modules	194 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs

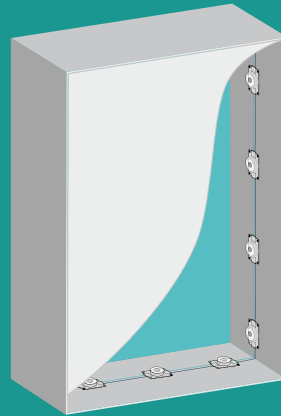


Double-sided boxes and totem up to 4000 mm

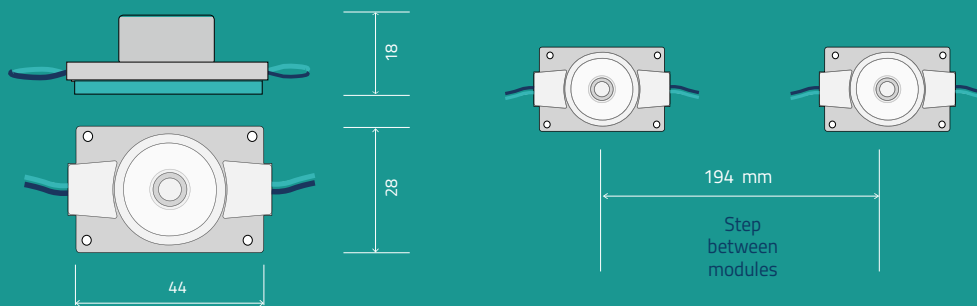

Code	Colour	Colour temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-1L-PLUS-2W	White	6500K	150	2	0.17	DC 12V




Direct light

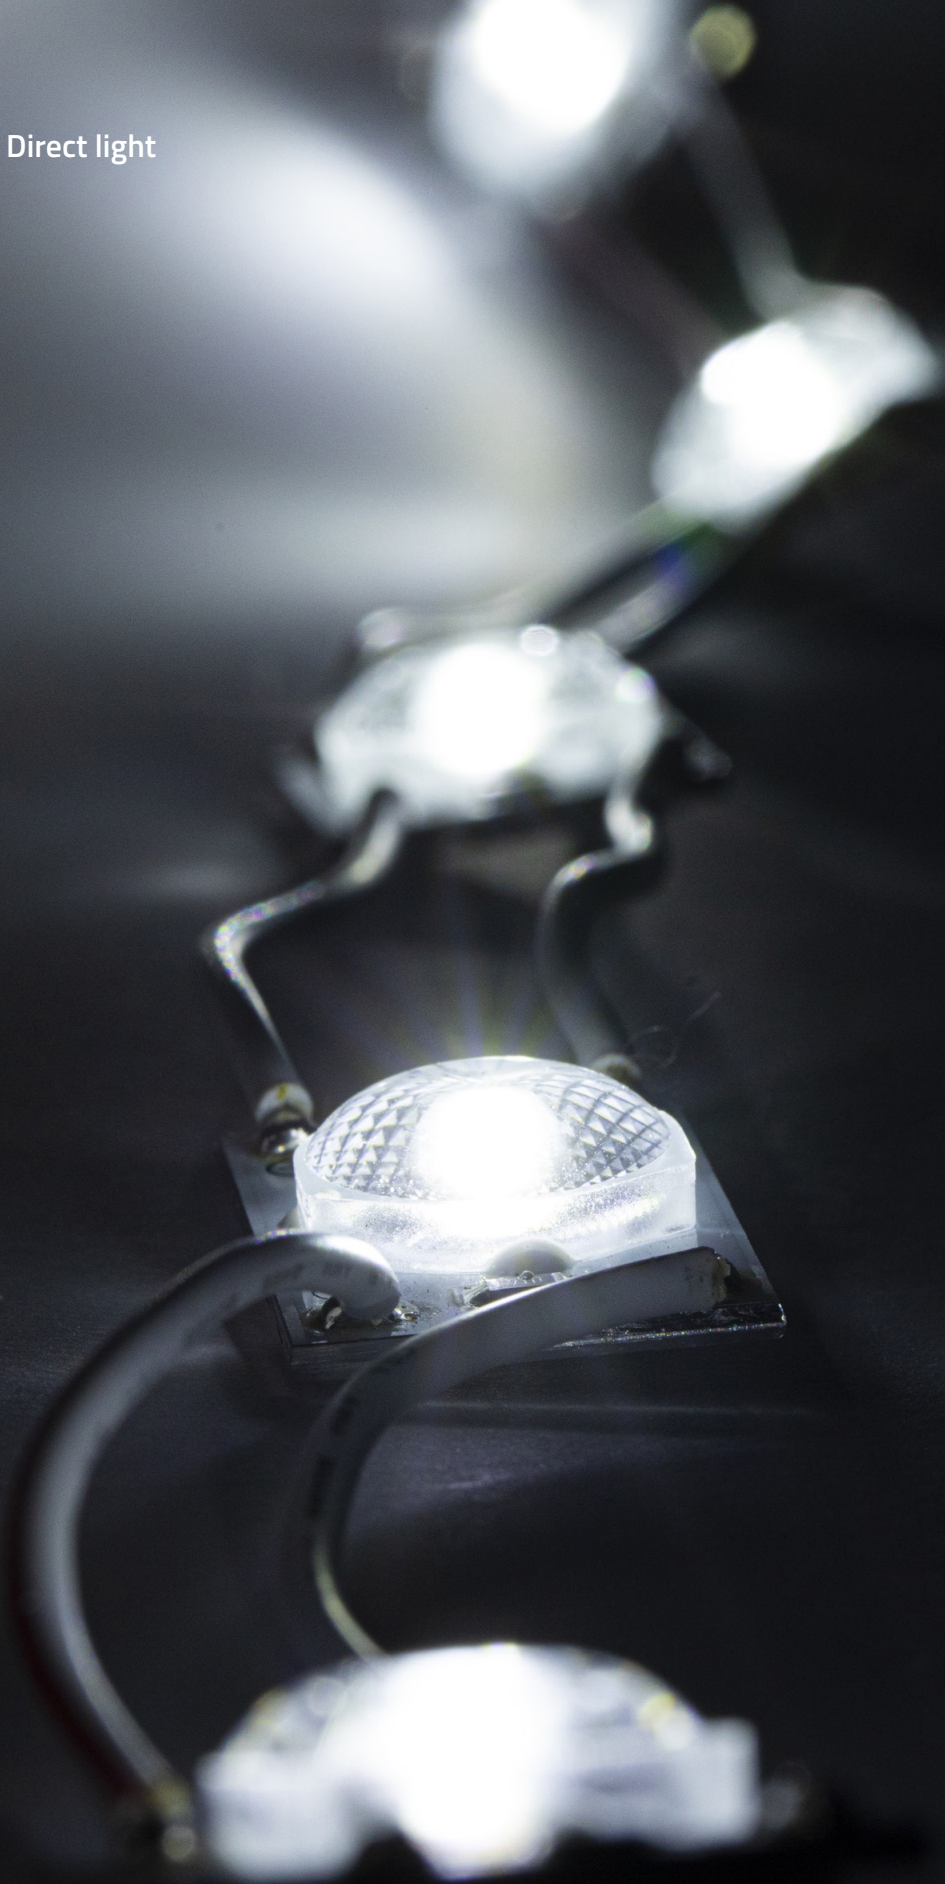



NEW CHAIN

Internal single-sided

Operating voltage	DC 12V
Consumption	0.75W
Light angle	160°
IP degree	IP 20
Operating temperature	-20°C +55°C
Recommended depth	from 60 to 120 mm
Step modules	105 mm
Max connectable	20 pcs
Packaging	100 pcs
Warranty	5 years
Certifications	CE & Rohs

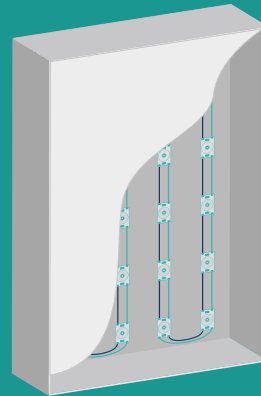

Medium sized boxed letters.
Backlighting of single-sided signs
from 60 to 120 mm.

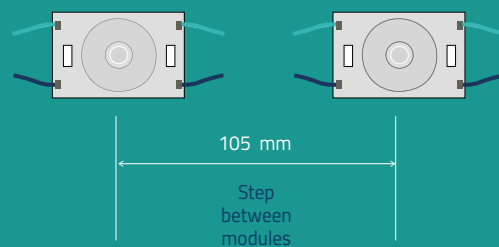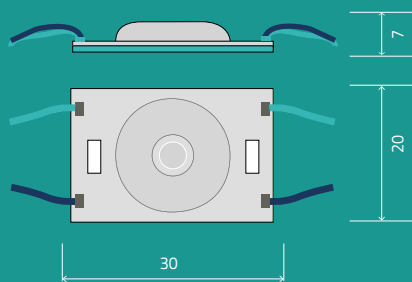

Code	Colour	Colour Temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltage
LU-1L-REG-PW	White	6500K	100	0.75	0.0625	DC 24V



Direct light




PUBBLICITA64


STRIP REGULAR

Internal single-sided

Operating voltage	DC 12V
Consumption	4.8W/m
Light angle	120°
IP degree	IP 20
Operating temperatur	-20°C +55°C
Recommended depth	from 40 to 200 mm
Max connectable	5 m
Packaging	50 m/roll
Warranty	2 years
Certifications	CE & Rohs

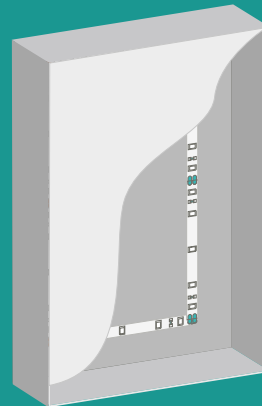

Medium sized boxed letters.
Backlighting of single-sided signs
from 40 to 200 mm

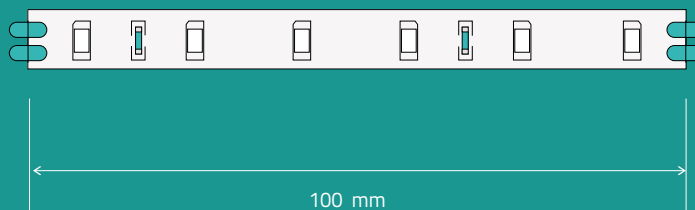

Code	Colour	Colour Temperature	Lumen (lm)	Consumption (W/pc)	Current (A/pc)	Operating voltag
LU-60L-STRIP-PW	White	6500K	22	4.8	0.4	DC 24V
LU-60L-STRIP-NW	Natural White	4000K	22	4.8	0.4	DC 24V
LU-60L-STRIP-WW	Warm White	3000K	22	4.8	0.4	DC 24V

Pubblicità 64 Srl
Via Camillo Golgi, 27
25064 Gussago BS

info@pubblicita64.com
+39 030 312771