

Made in Italy

NARDI

HARVESTING EQUIPMENT HEADERS
SINCE 1980 TRAILERS



NARDI
PICK-UP

Header to collect windrowed crops EN



NARDI PICK-UP

NARDI PICK-UP is the header designed to collect crops cut and put in pathways, such as peas, chickpeas, lucerne, lentils, chicory, salad, carrot, ryegrass, beetroot, broad beans, trefoil and many more.

Its design, combined with its technology, allows the operator to easily collect windrowed crops in any condition, controlling every operation from the combine's cabin.



HIGH COMPATIBILITY

COMPATIBLE WITH EVERY COMBINE HARVESTER



HIGH PERFORMANCES

ADVANCED TECHNOLOGY AND DESIGN



HIGH QUALITY

TOP QUALITY MATERIALS FROM
ITALIAN CERTIFIED SUPPLIERS

PIVOTING WHEELS

NARDI PICK-UP is provided with **two pivoting wheels** placed to stabilize the gathering belt.

Adjustable in height, they allow a perfect maneuverability of the header, even in harsh environments.




GATHERING SYSTEM

The frontal gatherer is provided with **zinc-coated steel teeth with springs held by bolts**. The spring teeth allow perfect gathering of product in pathway and its flowing to the feeding auger.

The gatherer's height and its working speed are adjustable from the combine cabin thanks to a hydraulic connection that activate this feature even on combines equipped with only electric control. An electro-hydraulic multifaster is optionally installable for combines provided with variable-capacity hydrodynamic system.

On either side, the gatherer features two manually adjustable springs to absorb the shocks of the ground.

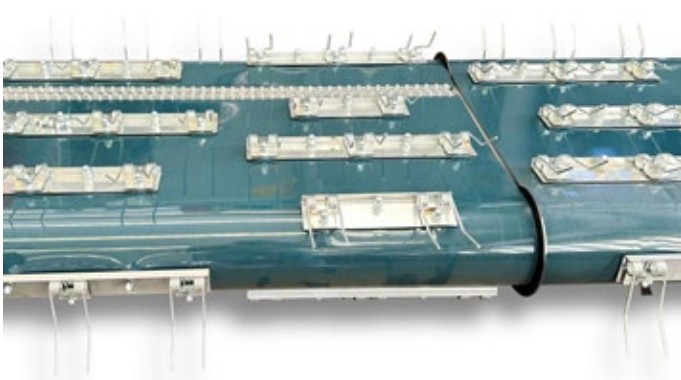

AUGER WITH RETRACTABLE FINGERS

The big diameter **feeding auger**, vertically and horizontally adjustable, swiftly moves the collected product towards the combine threshing channel.

It features **robust retractable fingers made of tempered steel**. They slide in and out the auger during its rotation. For maximum protection, a specific breaking point is integrated to prevent damage to the header in the event of an overload.

Along the auger, steel-plated access holes are located for easy maintenance or replacement of the fingers, should the need arise.



OPTIONALS

SINGLE BELT

The gathering system can be equipped with one single gathering belt which covers the whole working width. This minimizes any potential seed losses caused by the possible misalignment of the belts due to vibrations or uneven terrain.




SWATH HOLDER

Windrow support with mechanical or hydraulic adjustment of the working position for improved product containment.



REAR GRID

The metal grid is optionally available to better contain the product and protect the combine's cabin from any biomass spillage that may be thrown from the auger.

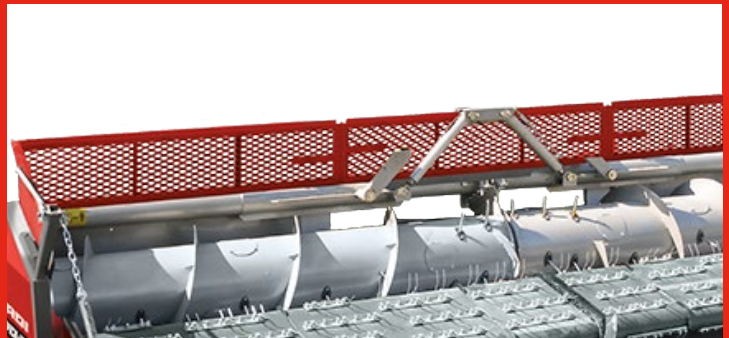


ELECTRO-HYDRAULIC CONNECTION

An electro-hydraulic connection can be installed on the header for combine harvesters equipped with a variable-capacity hydrodynamic system.



Lateral view

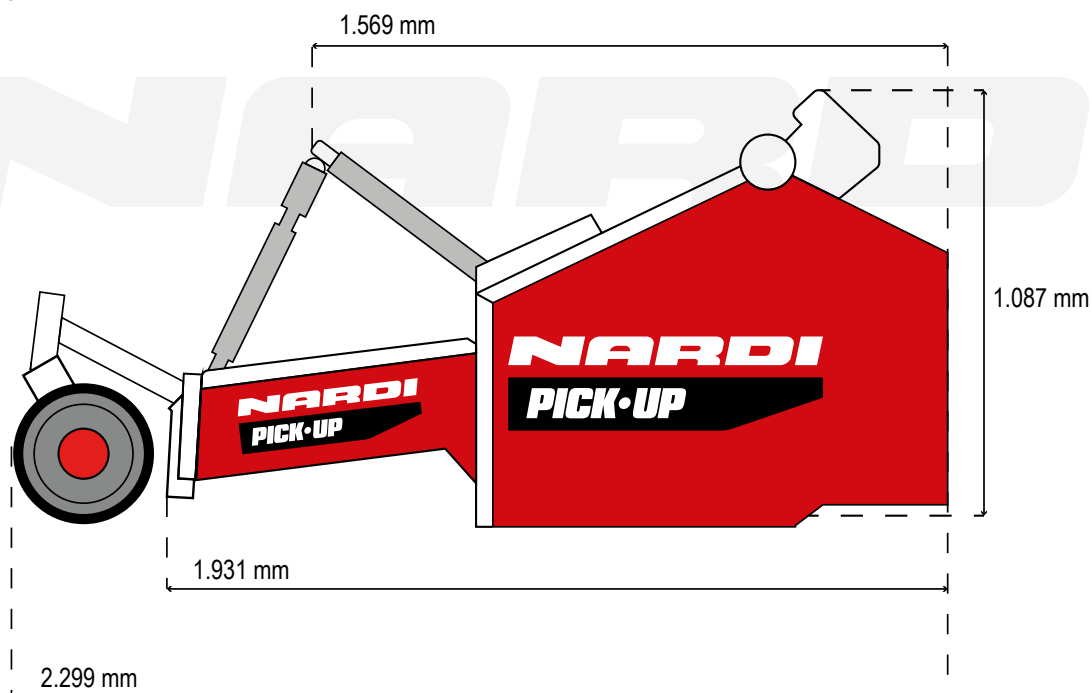

MODELS (RIGID)	WORKING WIDTH	INTERNAL WIDTH (SKIDS FITTED)	TOTAL WIDTH (WHEELS FITTED)	WEIGHT
PK 2.5	2.500 mm	2.815 mm	3.030 mm	800 kg
PK 3.0	3.000 mm	3.315 mm	3.480 mm	900 kg
PK 3.5	3.500 mm	3.565 mm	3.780 mm	970 kg
PK 4.0	4.000 mm	4.330 mm	4.430 mm	1.050 kg
PK 5.0	5.000 mm	5.335 mm	5.475 mm	1.400 kg
PK 5.8	5.800 mm	6.100 mm	6.325 mm	1.600 kg
PK 6.0	6.000 mm	6.100 mm	6.400 mm	1.690 kg

SPARE PARTS AVAILABLE ON STOCK

NARDI TRAILERS

NARDI also produces a wide range of EU-certified trailers for the road transport of headers from 6m (20 ft) to 18 m (60ft).

Company certified by the Italian Ministry of Infrastructure and Transport.





Made in Italy
NARDI
HARVESTING EQUIPMENT HEADERS
SINCE 1980 TRAILERS

NARDI SRL

Viale dell'Industria 30/A, 37040 - Veronella, Verona, Italy

Ph: +39 045 7665 570

VAT: IT02692480235

info@nardi-harvesting.com

SDI: W7YVJK9

www.nardi-harvesting.com

NARDI SRL

Certified company by
Italian Ministry of
Infrastructure and Transport



Nardi on Youtube

