



presents

Gas cylinders and cartridges range

OUR BUTANE PIERCING GAS CARTRIDGES

1 1 2 0 S 1

KEMPER
BRAND



Butane 190 gr piercing
cartridge with Stop Gas
safety system, BLUE color

P L 7 0 7

Butane 190 gr piercing
cartridge with Stop Gas
safety system, ORANGE
color



PLEIN AIR
BRAND

Maximum reached temperature
in air 1200°C (airpropanic use)

1 1 2 0

KEMPER
BRAND



190 gr piercing cartridge,
without stopgas system,
available only for non - EU
market

OUR BUTANE GAS CARTRIDGES

1 0 0 5 1



90 gr butane gas cartridge to be used as refiller of lighters and microsoldering torches

1 0 0 5 2



300 ml butane gas cartridge to be used as refiller of lighters and microsoldering torches

REFILLER OF:



5 7 7



227 gr butane gas cartridge for SMART LINE



SUITABLE FOR



OUR GAS MIXTURES

1 1 2 1 F



30 % propane/ 70% butane

230 gr cartridge with 7/16" threaded valve.



1 1 2 6 F 4 6



30 % propane/ 70% butane


460 gr cartridge with 7/16" threaded valve

5 7 5 SUPERGAS



330 gr (600ml) cartridge with 7/16" threaded valve

30 % propane/ 70% butane

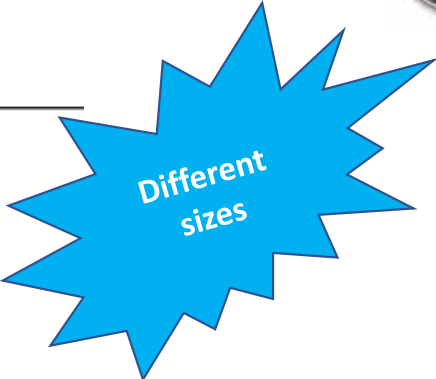

5 7 6 SUPERGAS MINI



175 gr (300ml) cartridge with 7/16" threaded valve

30 % propane/ 70% butane



OUR GAS MIXTURES

K E M A P 5 8 1 N

5 8 0 N O V A C E T



385gr Kemap gas cylinder



- High Performance
- Safety
- Economic
- Ecological



330 gr Novacet gas mixture cylinder with 7/16" threaded valve.

K E M A P 5 8 1



250 gr Kemap gas cylinder for Upside-down position use



5 8 0 S M I N I N O V A C E T P L U S

5 8 0 S N O V A C E T P L U S



330 gr Novacet gas mixture cylinder with 7/16" threaded valve. For Upside-down position use



Special mix for high performances



220 gr Novacet gas mixture cylinder with 7/16" threaded valve. For Upside-down position use



Kemap industrial applications:
 Workshops by: Oxyfuel, Boilers, Metal structure
 Maintenance: Roads, Railroads, Factories, Industries
 Installation: Plumbing, Heating, Air-Conditioning

OUR TECHNICAL GASES

5 7 1 O S S I G E N O - O X Y G E N



110 litres disposable oxygen cylinder. Medium pressure (110 bar).

Valve M10x1

5 7 1 A 1 2



Like 571 but with valve M12x1

5 8 5 H 2 0 0



200 litres refillable oxygen cylinder. High pressure (200 bar).

Valve M24x2

5 7 8 C O 2



600 gr disposable CO2 cylinder. Medium pressure (110 bar).

Valve M10x1

5 7 8 A C O 2

500 gr disposable CO2 cylinder. Medium pressure (36 bar).

Valve M10x1



5 6 9 A R G O N

242 litres disposable argon cylinder. Medium pressure (110 bar).

Valve M10x1



5 6 8 A R G O N C O 2

242 litres disposable argon (86%) CO2 (14%) cylinder. Medium pressure (110 bar).

Valve M10x1



OTHER SPECIAL PRODUCTS

1 1 6 0

1 1 6 1

1 1 6 2



Refillable cylinders complete with cock with safety valve and protection handle.

Italian connection (20x1/14 left)

2-3-5 Kg

1 7 2 6



Gas leak spray detector. Ecological and not flammable.

It makes bubbles if there is a leakage!



OTHER SPECIAL PRODUCTS

E L I O 5 7 3



Set containing Helium cylinder (110bar), inflating valve, 30 balloons, 20 m balloon's strings



Balloons made in natural rubber latex



Floating period: 8 – 12 hours (depending on ambient pressure and temperature)

