


Hospital doors

Controlled atmosphere environments (hospitals, clinics, rehabilitation units, nursing homes, centers for the disabled, nursing homes, clinics, medical offices, dental offices)



X-ray rooms

Cleanroom

Casing is hinged and locks in open position for easy servicing.

Other sectors

Pharmaceutical industry

Salt hacking recording environments and sound-insulated

Electronics workshops

Testing laboratories (pharmaceutical and or chemical)

Hospitals, clinics, care and nursing homes are all places built to look after people's health and well being, and are used by people with reduced mobility, such as orthopaedic and geriatric wards, or by people who may need to be moved around on wheelchairs or stretchers.

Hospital doors used by the health industry is

not an option, but an essential requirement. Coltech, the automatic entrance specialist, offers a wide range of automations for civil, industrial and commercial buildings without forgetting the special requirements of the health industry, the hospital doors.

> rugged control panel is flush with

the frame




Automation

Custom-designed for safe. precise operation in extreme operating environments. the control logic has been specially developed for cold storage doors, allowing it to be adapted to all operating requirements.

As standard, the automation comes compete with airtight electrical panel and prewired control panel inserted in the frame upright, ready for connection to the electrical mains without any need for complicated adjustments and wiring.

Programming takes place in autolearning mode on first start-up and functions can be selected on a display using just two buttons. positioning control is provided by an encoder allowing continuous monitoring of the entire automation and detection of any obstacles.

A wide range of optional accessories are available.

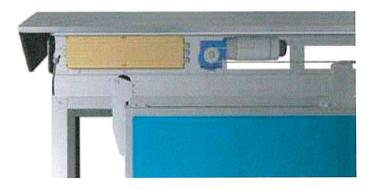

Control Logic

Technical specifications



Power supply 230 V single-phase



HIGH-TORQUE 24 VDC motor



Opening and closing deceleration functions controlled by PWM

modulation and encoder with no need for limit switches



Operating assured even in case of power failures thanks to the buffer

batteries



Obstacle detection with four sensitivity levels programmable to suit the door's dimensions



Panic opening allowing a person to exit triggered by just operating the lever handle



Closure hammer blow to increase gasket compression against the frame



Control panel and board wired on the door







Colours

When doors in different production areas have to be differentiated, a range of colours applicable to all our door models is available. The paints used are non-toxic and suitable for the food industry, and light ad UV-fast



Colours	RAL	PL	PV	PLX
Pure white	9010	4	4	4
Grey white	9002		4	
Signal white	9003	4		
Sky blue	5015	4		
Light blue	5012			4
Moss green	6005		4	
Mint green	6029			4
Flame red	3000	4		
Trafic red	3020			4
Rape yellow	1020	4		4

Doors with CE approval



Via Rivera 136/2 - 10040 Almese (TO) - Italy Tel. ++39 011. 9370518 Fax ++39 011.9319297 www.coldtech.tech