




OB 3000



OB 2012

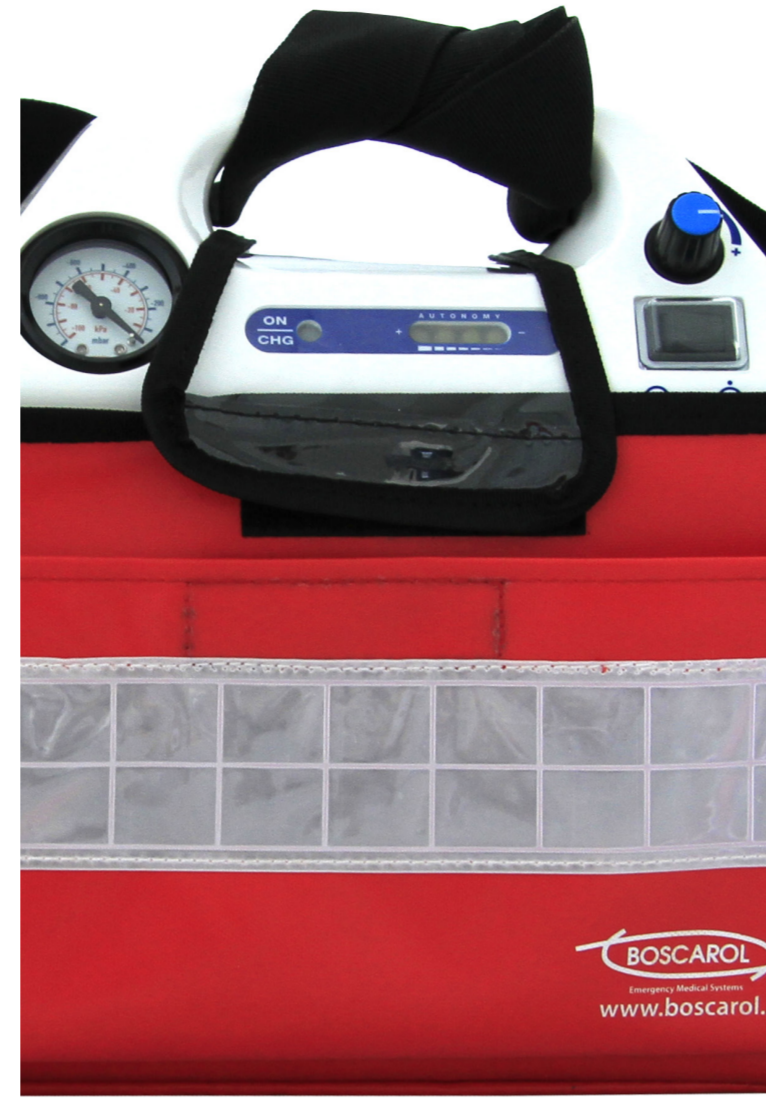

OB 1000



OB MINI

BOSCAROL SUCTION UNIT

FLOW RATE-MAX VACUUM

33 LPM - 800 mbar (80 kPa)

30 LPM - 800 mbar (80 kPa)

25 LPM - 850 mbar (85 kPa)

25 LPM - 850 mbar (85 kPa)

RATED VOLTAGE

11÷25 Vdc

12 Vdc

12 Vdc

11÷25 Vdc

AUTONOMY

> 70 minutes

> 60 minutes

> 45 minutes

> 100 minutes

IP RATING

IP 44

IP 34d

IP 34d

IP 43

BATTERY TYPE

removable LIPO 5 Ah 11,1 V

12 V 4 Ah Pb/Ca

12 V 3.4 Ah Pb/Ca

LIPO 5 Ah 11,1 V

WARRANTY

5 years

3 years

2 years

3 years

PERIODIC MAINTENANCE

2 years (automatic reminder)

2 years

2 years

2 years (automatic reminder)

RTCA DO160G

YES - AVIO version

NO

YES - AVIO version

YES - AVIO version

DIMENSIONS

360×244(h)×110 mm

370×290(h)×130 mm

335×290(h)×105 mm

290×240(h)×95 mm

WEIGHT

2,6 kg

4,2 kg

3,3 kg

1,8 kg



Emergency Medical Systems