













THE EXCELLENCE
BETWEEN NATURE,
QUALITY AND
TECHNOLOGY.

Two lines a LNCC Target.

Unico Wall Coping EVOLUTION and Elite were born from the ability of thinking in a different way, of renewing starting from the raw materials, without being subjected to the constraints imposed by consolidated practices.


Two Lines that have revoluzionized the Wall Coping System, by joining the **1 meter Lenght to the Joint System** and the excellent surface finishing, getting, in this way, performance levels never seen before.










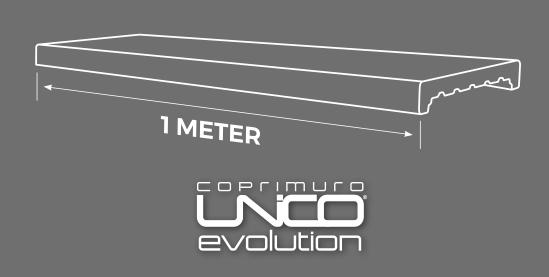

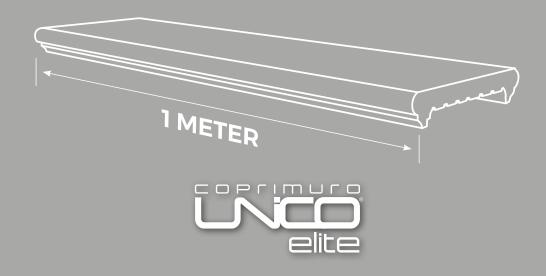

30 YEARS OF INNOVATION...

30 Years of Experience and Know-how in the production and processing of building products let **IMER SrI** be a company strongly oriented to the product's and service's excellence, with a view to profitable relations with the National and International market. The obsessive attention to product excellence, the impulse for innovation have been the foundations and the keys that have transformed the dream of a very young entrepreneur into reality.

Sands from natural stones, marble grits: only natural materials rigorously selected for products of high quality and aestethic profile able to respond to the requests and needs of an increasingly demanding and qualified

market. These are the values on which Imer Srl shapes its Mission. The high quality profile is a constant in its production, thanks to the **careful selection of local raw materials**, to the application of the most updated working and production methods that spring from 30 years of experience, to a structured organization and a qualified Team that guarantee quality and efficiency from the production departments to the commercial and distribution network.

All that establishes the competitive advantage of **IMER SrI** - ISO 9001 certified company – and guarantee production capacity, quality control and well-made products, functional and practical in terms of application and maintenance; unique products thanks to the care we put in the finishing phase.

























LENGHT 1 METER



FINISHING SIMIL MARBLE SUPER SMMOTHED



JOINT SYSTEM



ANTIFREEZE



WATER REPELLENT



SUPER PRESSED















SPECIAL AND CAREFUL PACKAGING

The packaging in special blister packs with 3-4 elements not only stabilizes the entire package, but avoid too any kind of domino effect, which is very important when removing the packaging.





WALL COPING lenght cm 100 in cement supersmoothed coloured and water resistant

		1 piece per ML				VAT EXCLUDED				
	ART.	INT. MEA.	weight per piece	PAL	LET		COS	ST IN \$ PER	ML	
		Cm	Kg	ML	Pz	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
100 cm 18 cm	CMU-EV/01	11,5	15,0	76	76	√	√	√	√	√
21 cm	CMU-EV/08	14,5	16,2	76	76	√	√	√	√	√
23 cm	CMU-EV/02	16,5	18,1	76	76	√	√	√	√	√
25,5 cm 25,5 cm	CMU-EV/09	19	19,0	57	57	√	√	√	√	√
28 cm	CMU-EV/03	22	20,6	57	57	√	√	√	√	√
100 cm 30 cm 24 cm	CMU-EV/06	24	22,5	57	57	√	√	√	√	√
33,5 cm	CMU-EV/04	27	25,5	57	57	√	√	√	√	√
38,5 cm	CMU-EV/05	32	28,3	38	38	√	√	√	√	√
43,5 cm	CMU-EV/07	37	31,1	38	38	√	√	√	√	√

15% surcharge for unpalletised goods

INTEGRATE	ED LED SYSTEM	on request					
	ART.	DESCRIPTION	COST IN € PER ML*				
	CMU-LED	Recessed milling for aluminum channel housing for LED system integration	√				

^{*} processing performed on 1 side



HEADBOARD

lenght external measure cm 25 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET		cos	T IN \$ PER	PCS	
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
					Sec. 57			Billia
CMU-EV/T/01	11,5x22	3,4	60	√	√	√	√	√
CMU-EV/T/08	14,5x22	4,0	60	√	√	√	√	√
CMU-EV/T/02	16,5x22	4,3	60	√	√	√	√	√
CMU-EV/T/09	19x22	4,9	60	√	√	√	√	√
CMU-EV/T/03	22x22	5,3	60	√	√	√	√	√
CMU-EV/T/06	24x22	5,7	60	√	√	√	√	√
CMU-EV/T/04	27x22	6,3	60	√	√	√	√	√
CMU-EV/T/05	32x22	7,3	60	√	√	√	√	√
CMU-EV/T/07	37x22	8,3	60	√	√	√	√	√



LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON




MAXI CORNER*

lenght external measure cm 100 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET	COST IN \$ FOR COMPLETE CORNER						
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON		
					10.57					
CMU-EV/AN/01	11,5	13,50	/	√	√	√	√	√		
CMU-EV/AN/08	14,5	14,50	/	√	√	√	√	√		
CMU-EV/AN/02	16,5	16,30	/	√	√	√	√	√		
CMU-EV/AN/09	19	17,00	/	√	√	√	√	√		
CMU-EV/AN/03	22	18,50	/	√	√	√	√	√		
CMU-EV/AN/06	24	20,20	/	√	√	√	√	√		
CMU-EV/AN/04	27	22,90	/	√	√	√	√	√		
CMU-EV/AN/05	32	25,40	/	√	√	√	√	√		
CMU-EV/AN/07	37	27,90	/	√	√	√	√	√		

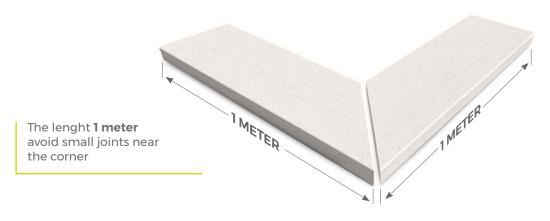

LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
				920

*MAXI CORNER

composed by two one meter long 45° cut pieces



COLUMN CAP*

in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET	COST IN \$ PER PCS					
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON	
				1	17			BOOK S	
CMU-EV/CP/01	27x27	8,8	60	√	√	√	√	√	
CMU-EV/CP/02	32x32	9,8	60	√	√	√	√	√	
CMU-EV/CP/03	37x37	10,8	60	√	√	√	√	√	

* cap with joint system



LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
24				





















LENGHT 1 METER



FINISHING SIMIL MARBLE SUPER SMMOTHED



JOINT SYSTEM



ANTIFREEZE



WATER REPELLENT



SUPER PRESSED









rounded profile





SPECIAL AND CAREFUL PACKAGING

The packaging in special blister packs with 3 elements not only stabilizes the entire package, but avoid too any kind of domino effect, which is very important when removing the packaging.





WALL COPING

lenght cm 100 in cement supersmoothed coloured and water resistant

	1 piece per ML				VAT EXCLUDED				
ART.	INT. MEA.	weight per piece	PAL	LET.		COS	ST IN \$ PER	ML	
	Cm	Kg	ML	Pz	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
									BY DE
100 cm									
21 cm					_	_			_
CMU-EL/01	11,5	15,8	72	72	√	√	√	√	√
11,5 cm									
100 cm									
24.5 cm									
CMU-EL/07	14,5	17,0	72	72	√	√	√	√	√
14,5 cm									
100 cm									
24.5 am					_	_			_
CMU-EL/02	16,5	19,5	72	72	√	√	√	√	√
16,5 cm									
100 cm									
28.5 cm	19	22,0	54	54	-/	-1	-/	_/	-1
CMU-EL/08	19	22,0	54	54	√	√	√	√	√
□ 19 cm									
100 cm									
31 cm CMU-EL/03	22	24,1	54	54	√	√	√	√	√
		۷٦,۱	54	54	V	V	V	V	V
22 cm									
100 cm									
33,5 cm CMU-EL/06	24	25,2	54	54	√	√	√	√	√
		20,2	٥,	51	, v	V	V	٧	V
24 cm									
100 cm									
36,5 cm CMU-EL/04	27	26,3	36	36	√	√	√	√	√
· / _		20,0	50	50	, v	V	V	٧	V
27 cm									
100 cm									
42 cm CMU-EL/05	32	29,3	36	36	√	√	√	√	√
<pre>2</pre>		,_				4	4	•	
32 cm									

15% surcharge for unpalletised goods





HEADBOARD

lenght external measure cm 25 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET		cos	T IN \$ PER	PCS	
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
					SP		(P. 10)	Billi
CMU-EL/T/01	11,5x20	4,3	60	√	√	√	√	√
CMU-EL/T/07	14,5x20	4,6	60	√	√	√	√	√
CMU-EL/T/02	16,5x20	5,2	60	√	√	√	√	√
CMU-EL/T/08	19x20	5,8	60	√	√	√	√	√
CMU-EL/T/03	22x20	6,1	60	√	√	√	√	√
CMU-EL/T/06	24x20	6,7	60	√	√	√	√	√
CMU-EL/T/04	27x20	7,3	60	√	√	√	√	√
CMU-EL/T/05	32x20	8,3	60	√	√	√	√	√



LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
, a)				




MAXI CORNER*

lenght external measure cm 100 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET	COST IN \$ FOR COMPLETE CORNER							
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON			
					57.50		65.5				
CMU-EL/AN/01	11,5	14,20	/	√	√	√	√	√			
CMU-EL/AN/07	14,5	15,30	/	√	√	√	√	√			
CMU-EL/AN/02	16,5	17,50	/	√	√	√	√	√			
CMU-EL/AN/08	19	19,80	/	√	√	√	√	√			
CMU-EL/AN/03	22	21,70	/	√	√	√	√	√			
CMU-EL/AN/06	24	22,60	/	√	√	√	√	√			
CMU-EL/AN/04	27	23,70	/	√	√	√	√	√			
CMU-EL/AN/05	32	26,40	/	√	√	√	√	√			

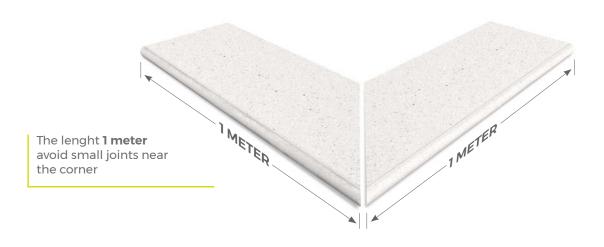

LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON	

*MAXI CORNER

composed by two one meter long 45° cut pieces



COLUMN CAP*

in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET	COST IN € PER PCS				
	Cm	lbs	PCS	LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
						101.33		
CMU-EL/CP/01	27x27	9,5	60	√	√	√	√	√
CMU-EL/CP/02	32x32	10,5	60	√	√	V	√	√

* cap with joint system



LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON	













LAYING AND GENERAL MAINTENANCE WARNINGS

In order to guarantee a long lasting life to the wall coping we advise to carry out, after the laying, a protective treatment on all the surface with a water resistant and perspiring product, which has to be transparent. Please, clean the surface before making it and spread it evenly on all sides. Our products, due to the fact that are produced using natural aggregates, carved, from local stones, could have different shades of colours.

GENERAL LAYING INSTRUCTIONS

Preparation of the laying surface: 1) clean the wall with water after having removed any kind of impurity; 2) let it dry; 3) remove carefully residual dust; 4) make sure there are no difference in level on the upper part of the wall.

Laying: 1) do not use classic cement mortar, in order to avoid the wall coping coming off over time; 2) use specific glues, following the manufacturer instructions; 3) keep between one wall coping and the other one a distance of about 1,5/2 mm. and use high quality wall putty following the manufacturer instructions; 4) do not use classic cement mortar as wall putty; make sure there are not less than 5 mm of air between plaster and drip; 5) Putty close to the hole around the fence post, avoiding placing more than 5 mm of putty around the fence post.

Safety: Adopt the safety devices and regulations in force.



IMER srl

Zona Industriale 73024 Maglie (Le) - ITALY

phone / fax +39 0836 423507 phone +39 0836 315814

commerciale@imerrivestimenti.it imeritalia.it

> UNI EN ISO 9001:2015 Certified Company







