

COPRIMURO UNICO[®]



Innovative



unique



resistant



Fast



 **IMER[®]**

TÜV
AUSTRIA
EN ISO 9001:2015
No. 20001210004370

INDUSTRY FOR BUILDING PRODUCTS

Made in Italy






THE EXCELLENCE
BETWEEN NATURE,
QUALITY AND
TECHNOLOGY.

Two lines a UNICO® Target.

Unico Wall Coping *evolution* and *elite* were born from the ability of thinking in a different way, of renewing starting from the raw materials, without being subjected to the constraints imposed by consolidated practices.

Two Lines that have revoluzionized the Wall Coping System, by joining the **1 meter Lenght to the Joint System** and the excellent surface finishing, getting, in this way, performance levels never seen before.

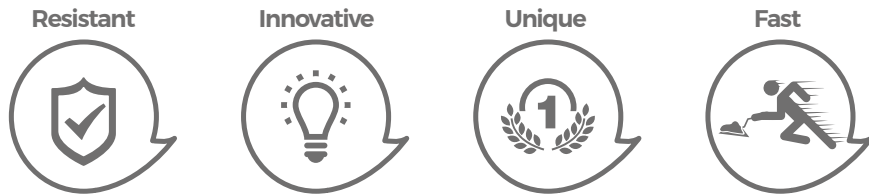

COPRIMURO
UNICO
evolution



COPRIMURO
UNICO
elite

30 YEARS OF INNOVATION...

30 Years of Experience and Know-how in the production and processing of building products let **IMER Srl** be a company strongly oriented to the product's and service's excellence, with a view to profitable relations with the National and International market. The obsessive attention to product excellence, the impulse for innovation have been the foundations and the keys that have transformed the dream of a very young entrepreneur into reality.

Sands from natural stones, marble grits: only **natural materials rigorously selected for products of high quality and aesthetic profile** able to respond to the requests and needs of an increasingly demanding and qualified market. These are the values on which Imer Srl shapes its Mission.

The high quality profile is a constant in its production, thanks to the **careful selection of local raw materials**, to the application of the most updated working and production methods that spring from 30 years of experience, to a structured organization and a qualified Team that guarantee quality and efficiency from the production departments to the commercial and distribution network.



All that establishes the competitive advantage of **IMER Srl** - ISO 9001 certified company - and guarantee production capacity, quality control and well-made products, functional and practical in terms of application and maintenance; unique products thanks to the care we put in the finishing phase.



INDUSTRY FOR BUILDING PRODUCTS

Made in Italy



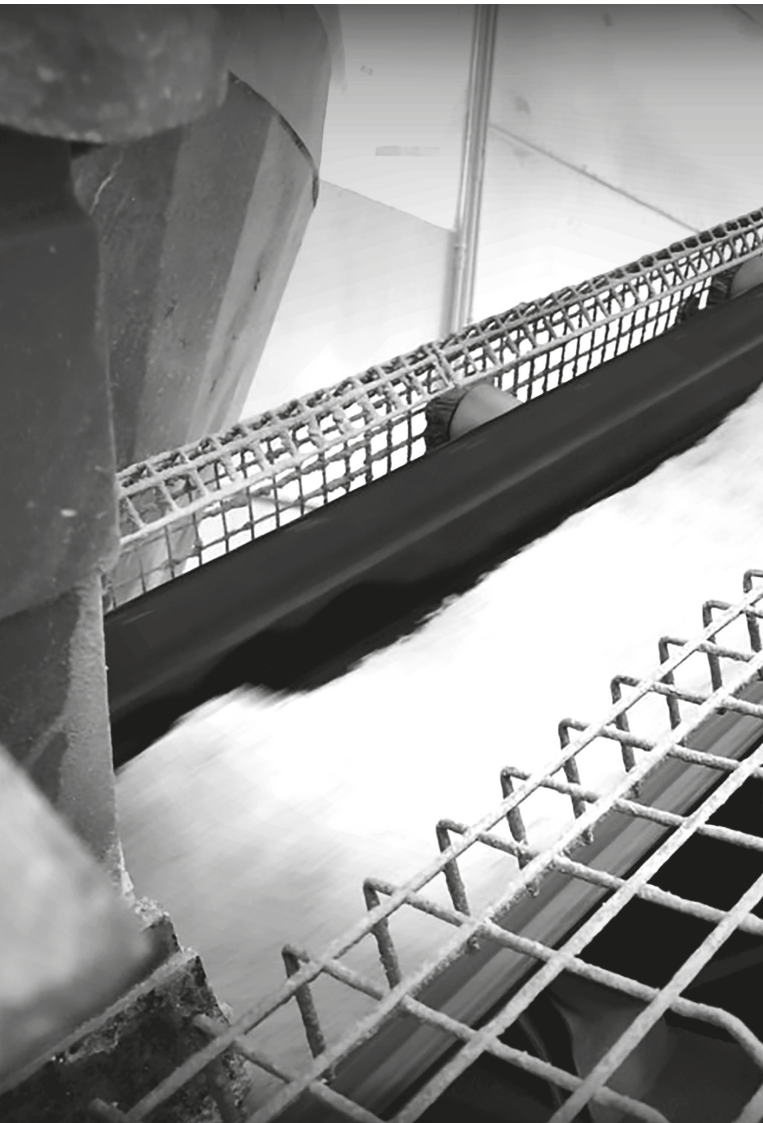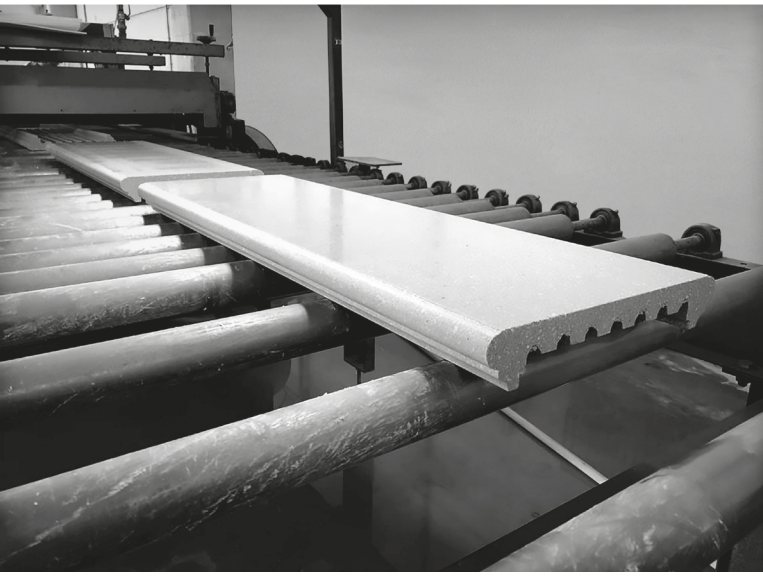





INDUSTRY FOR BUILDING PRODUCTS

COPRIMURO
UNICO[®]
evolution



evolution

COPRIMURO
UNICO[®]
 evolution
 square profile



LENGHT
1 METER



FINISHING
 SIMIL MARBLE
 SUPER SMMOTHED



JOINT
 SYSTEM



ANTIFREEZE



WATER
 REPELLENT



SUPER PRESSED





INDUSTRY FOR BUILDING PRODUCTS

Made in Italy



INTEGRATED LED SYSTEM
on request

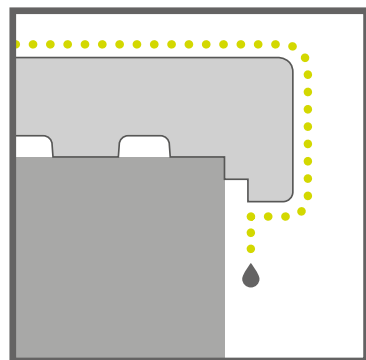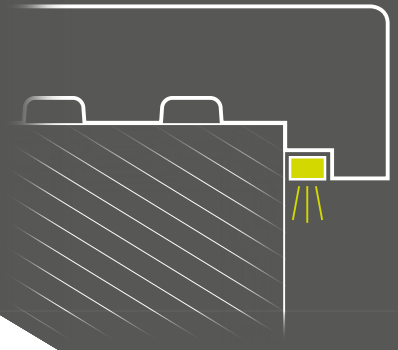

DROP BREAKER SYSTEM
to avoid dripping on the walls

Resistant



Innovative



Unique



Fast



LIGHT GREY




NEW
DARK GRAY



NEW
VOLCANIC BLACK




RED




WHITE





YELLOW



LIGHT SALMON



COPRIMURO
UNICO[®]
evolution
square profile

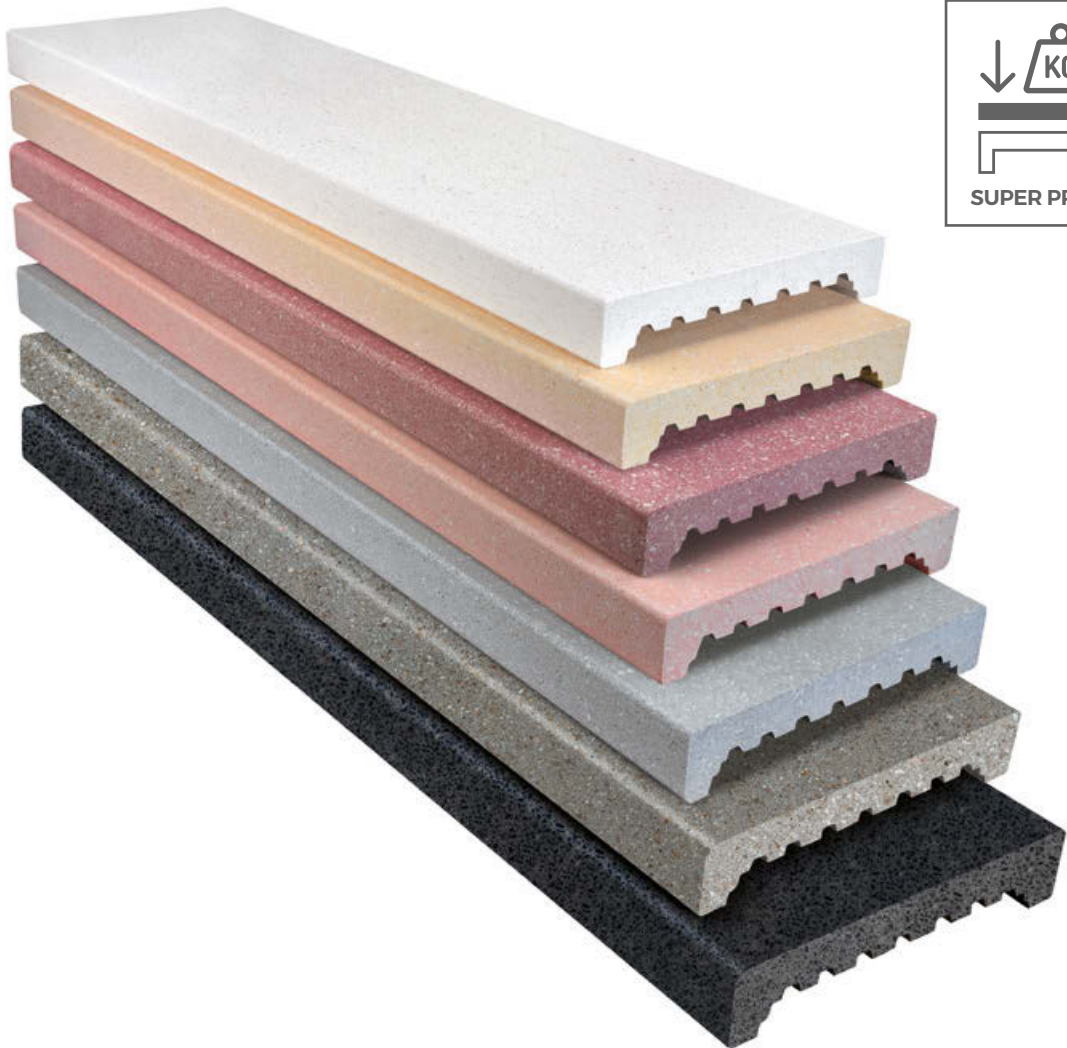

SPECIAL AND CAREFUL PACKAGING

The packaging in special blister packs with 3-4 elements not only stabilizes the entire package, but avoid too any kind of domino effect, which is very important when removing the packaging.



INDUSTRY FOR BUILDING PRODUCTS










Made in Italy 

WALL COPING

length cm 100 in cement supersmoothed coloured and water resistant

1 piece per ML


VAT EXCLUDED

ART.	INT. MEA	weight per piece	PALLET		COST IN \$ PER ML							
			Cm	Kg	ML	Pz	LIGHT GREY	DARK GRAY	VOLCANIC BLACK	RED	WHITE	YELLOW
 CMU-EV/01	11,5	15,0	76	76	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/08	14,5	16,2	76	76	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/02	16,5	18,1	76	76	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/09	19	19,0	57	57	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/03	22	20,6	57	57	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/06	24	22,5	57	57	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/04	27	25,5	57	57	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/05	32	28,3	38	38	✓	✓	✓	✓	✓	✓	✓	✓
 CMU-EV/07	37	31,1	38	38	✓	✓	✓	✓	✓	✓	✓	✓

15% surcharge for unpalletised goods

INTEGRATED LED SYSTEM

on request



ART.	DESCRIPTION	COST IN € PER ML *
CMU-LED	Recessed milling for aluminum channel housing for LED system integration	✓

* processing performed on 1 side


COPRIMURO
UNCO[®]
 evolution
 square profile

HEADBOARD

length external measure cm 25 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN \$ PER PCS						
				LIGHT GREY	DARK GRAY	VOLCANIC BLACK	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EV/T/01	11,5x22	3,4	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/08	14,5x22	4,0	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/02	16,5x22	4,3	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/09	19x22	4,9	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/03	22x22	5,3	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/06	24x22	5,7	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/04	27x22	6,3	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/05	32x22	7,3	60	✓	✓	✓	✓	✓	✓	✓
CMU-EV/T/07	37x22	8,3	60	✓	✓	✓	✓	✓	✓	✓

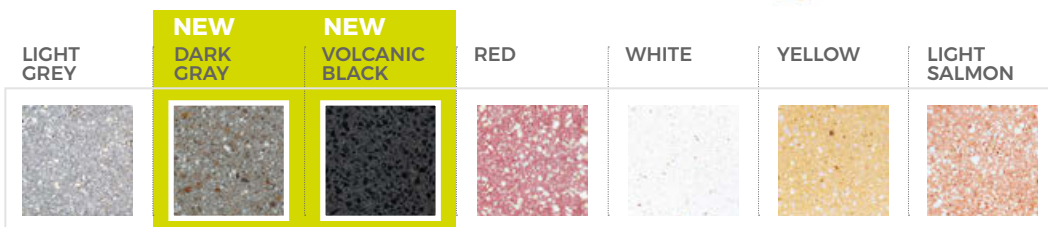


MAXI CORNER*

length external measure cm 100 in cement supersmoothed coloured and water resistant

VAT EXCLUDED


ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN \$ FOR COMPLETE CORNER						
				LIGHT GREY	DARK GRAY	VOLCANIC BLACK	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EV/AN/01	11,5	13,50	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/08	14,5	14,50	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/02	16,5	16,30	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/09	19	17,00	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/03	22	18,50	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/06	24	20,20	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/04	27	22,90	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/05	32	25,40	/	✓	✓	✓	✓	✓	✓	✓
CMU-EV/AN/07	37	27,90	/	✓	✓	✓	✓	✓	✓	✓

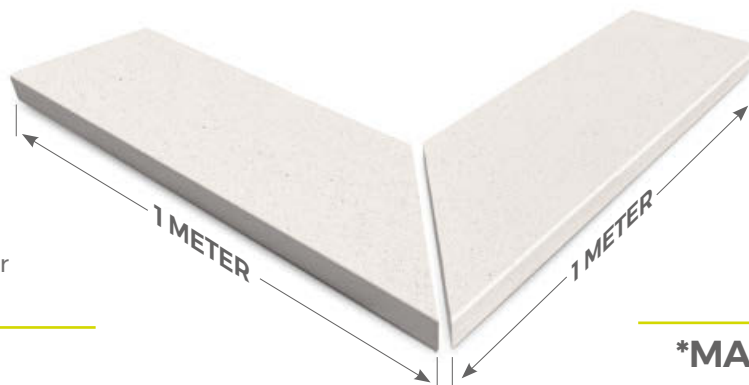

The length **1 meter**
avoid small joints near
the corner

***MAXI CORNER**

composed by two one
meter long 45° cut pieces

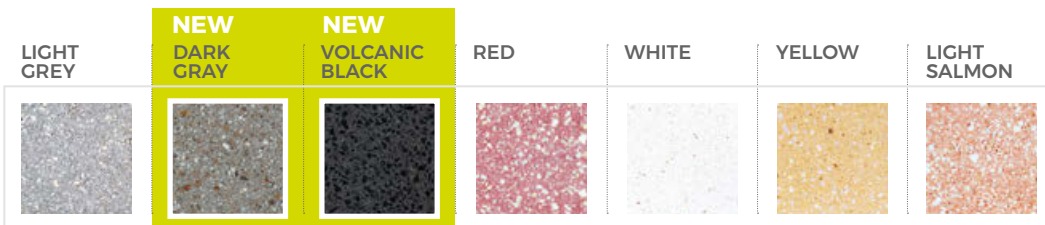


COLUMN CAP*
in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN \$ PER PCS						
				LIGHT GREY	DARK GRAY	VOLCANIC BLACK	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EV/CP/01	27x27	8,8	60							
				✓	✓	✓	✓	✓	✓	✓
CMU-EV/CP/02	32x32	9,8	60							
				✓	✓	✓	✓	✓	✓	✓
CMU-EV/CP/03	37x37	10,8	60							
				✓	✓	✓	✓	✓	✓	✓

* cap with joint system

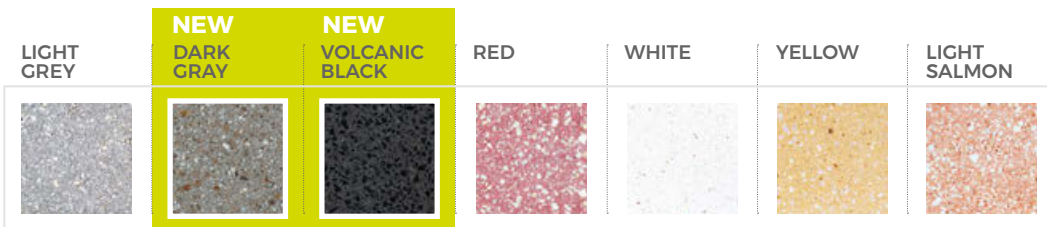




evolution





COPRIMURO
UNICO[®]
elite

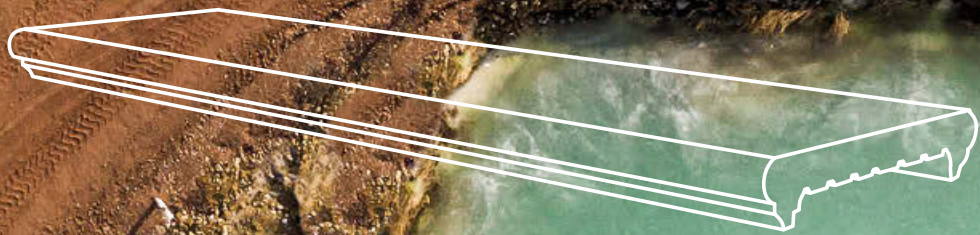


COPRIMURO
UNICO[®]
 elite
 rounded profile



LENGHT
1 METER



FINISHING
 SIMIL MARBLE
 SUPER SMMOTHED



JOINT
 SYSTEM



ANTIFREEZE



WATER
 REPELLENT




SUPER PRESSED



INDUSTRY FOR BUILDING PRODUCTS

Made in Italy

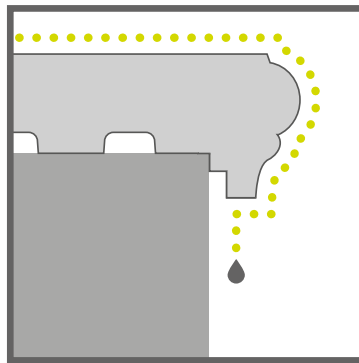

DROP BREAKER SYSTEM
to avoid dripping on the walls

Resistant



Innovative



Unique




Fast



LIGHT GREY




RED




WHITE




YELLOW



LIGHT SALMON



COPRIMURO
UNICO[®]
elite
rounded profile



SPECIAL AND CAREFUL PACKAGING

The packaging in special blister packs with 3 elements not only stabilizes the entire package, but avoid too any kind of domino effect, which is very important when removing the packaging.











INDUSTRY FOR BUILDING PRODUCTS

Made in Italy 

WALL COPING
length cm 100 in cement supersmoothed coloured and water resistant

1 piece per ML

VAT EXCLUDED

ART.	INT. MEA.	weight per piece	PALLET		COST IN \$ PER ML				
			Cm	Kg	ML	Pz	LIGHT GREY	RED	WHITE
 CMU-EL/01	11,5	15,8	72	72	✓	✓	✓	✓	✓
 CMU-EL/07	14,5	17,0	72	72	✓	✓	✓	✓	✓
 CMU-EL/02	16,5	19,5	72	72	✓	✓	✓	✓	✓
 CMU-EL/08	19	22,0	54	54	✓	✓	✓	✓	✓
 CMU-EL/03	22	24,1	54	54	✓	✓	✓	✓	✓
 CMU-EL/06	24	25,2	54	54	✓	✓	✓	✓	✓
 CMU-EL/04	27	26,3	36	36	✓	✓	✓	✓	✓
 CMU-EL/05	32	29,3	36	36	✓	✓	✓	✓	✓

15% surcharge for unpalletised goods



COPRIMURO
UNICO[®]
 elite
 rounded profile

HEADBOARD

length external measure cm 25 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN \$ PER PCS				
				LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EL/T/01	11,5x20	4,3	60	✓	✓	✓	✓	✓
CMU-EL/T/07	14,5x20	4,6	60	✓	✓	✓	✓	✓
CMU-EL/T/02	16,5x20	5,2	60	✓	✓	✓	✓	✓
CMU-EL/T/08	19x20	5,8	60	✓	✓	✓	✓	✓
CMU-EL/T/03	22x20	6,1	60	✓	✓	✓	✓	✓
CMU-EL/T/06	24x20	6,7	60	✓	✓	✓	✓	✓
CMU-EL/T/04	27x20	7,3	60	✓	✓	✓	✓	✓
CMU-EL/T/05	32x20	8,3	60	✓	✓	✓	✓	✓




MAXI CORNER*

length external measure cm 100 in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN \$ FOR COMPLETE CORNER				
				LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EL/AN/01	11,5	14,20	/	✓	✓	✓	✓	✓
CMU-EL/AN/07	14,5	15,30	/	✓	✓	✓	✓	✓
CMU-EL/AN/02	16,5	17,50	/	✓	✓	✓	✓	✓
CMU-EL/AN/08	19	19,80	/	✓	✓	✓	✓	✓
CMU-EL/AN/03	22	21,70	/	✓	✓	✓	✓	✓
CMU-EL/AN/06	24	22,60	/	✓	✓	✓	✓	✓
CMU-EL/AN/04	27	23,70	/	✓	✓	✓	✓	✓
CMU-EL/AN/05	32	26,40	/	✓	✓	✓	✓	✓

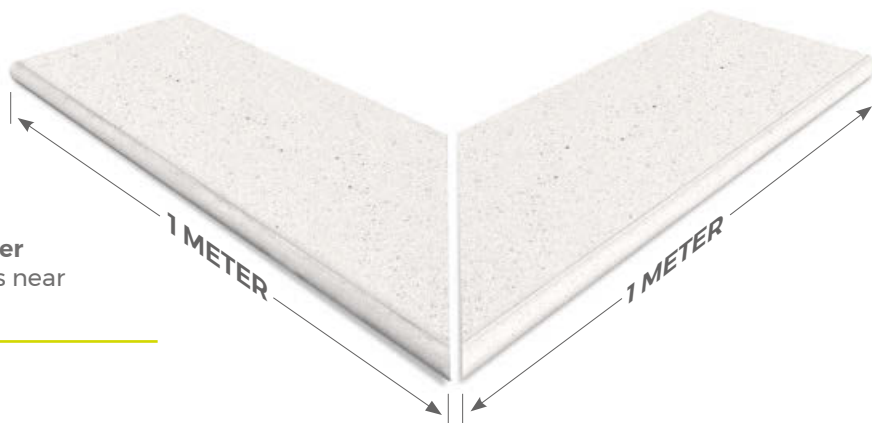

The length **1 meter**
avoid small joints near
the corner



***MAXI CORNER**

composed by two one
meter long 45° cut pieces

COLUMN CAP*

in cement supersmoothed coloured and water resistant

VAT EXCLUDED

ART.	INT. MEA. Cm	weight per piece lbs	PALLET PCS	COST IN € PER PCS				
				LIGHT GREY	RED	WHITE	YELLOW	LIGHT SALMON
CMU-EL/CP/01	27x27	9,5	60	✓	✓	✓	✓	✓
CMU-EL/CP/02	32x32	10,5	60	✓	✓	✓	✓	✓

* cap with joint system







ART.	DESCRIPTION	COST IN \$
EXPCPU	White exhibitor in painted steel	√

LAYING AND GENERAL MAINTENANCE WARNINGS

In order to guarantee a long lasting life to the wall coping we advise to carry out, after the laying, a protective treatment on all the surface with a water resistant and perspiring product, which has to be transparent. Please, clean the surface before making it and spread it evenly on all sides. Our products, due to the fact that are produced using natural aggregates, carved, from local stones, could have different shades of colours.

GENERAL LAYING INSTRUCTIONS

Preparation of the laying surface: 1) clean the wall with water after having removed any kind of impurity; 2) let it dry; 3) remove carefully residual dust; 4) make sure there are no difference in level on the upper part of the wall.

Laying: 1) do not use classic cement mortar, in order to avoid the wall coping coming off over time; 2) use specific glues, following the manufacturer instructions; 3) keep between one wall coping and the other one a distance of about 1,5/2 mm. and use high quality wall putty following the manufacturer instructions; 4) do not use classic cement mortar as wall putty; make sure there are not less than 5 mm of air between plaster and drip; 5) Putty close to the hole around the fence post, avoiding placing more than 5 mm of putty around the fence post.

Safety: Adopt the safety devices and regulations in force.



IMER srl

Zona Industriale
73024 Maglie (Le) - ITALY
phone / fax +39 0836 423507
phone +39 0836 315814

commerciale@imeritalia.it
imeritalia.it

UNI EN ISO 9001:2015
Certified Company

