

Made in Italy

NARDI

HARVESTING EQUIPMENT
SINCE 1980

HEADERS

TRAILERS



General Catalogue

WWW.NARDI-HARVESTING.COM



ABOUT US

WWW.NARDI-HARVESTING.COM

Founded in 1980, today NARDI is a recognized and exported brand in Europe, North America and Africa, renowned for the quality and reliability of its products, along with a particular care for innovation and constant product range improvement for the customer's satisfaction level. The philosophy of the company consists in producing high-efficiency and high quality machinery while aiming to reduce downtime and unnecessary expenses.

Today the company owns two production sites in a total area of 20.000 sq. meters where our products are designed, assembled and shipped. Production is carried out in Italy, raw materials and components are provided by selected Italian suppliers.

Homologated trailer production for use on the road involves strict annual inspections conducted by the Ministry of Transport which certifies the technical and manufacturing suitability of the company.

EXPORT

Nardi manages shipments worldwide. Nardi products are designed to maximize shipping efficiency with minimal disassembly.





SUNFLOWER HEADER

ROW FREE SYSTEM - UNIVERSAL FOR EVERY SUNFLOWER ROW SPACING WITHOUT ANY ADJUSTMENT NEEDED

NARDI SUNSTORM PANS SFH is designed to cut only the flower heads and leave the majority of the stalk in the field. Nardi offers a large range of optional power parts available. Sunstorm Pans can be used to harvest dry corn and sorghum. The transmission is protected by disc clutches.

FEATURES



- UNIVERSAL FOR EVERY ROW SPACING - FREE ROWS
- HARVESTS IN ANY DIRECTION
- HARVESTING SPEED UP TO 12KM/H
- MINIMIZES BIOMASS LOSSES
- LARGE DIAMETER AUGER WHICH ALLOWS CONSISTENT FLOW OF BIOMASS
- STALK CHOPPER AVAILABLE
- OPTIONAL POWER PARTS AVAILABLE
- LONG LIFE

MODEL	WORKING WIDTH
SFH400	4.3mt - 14ft
SFH600	5.9mt - 20ft
SFH740	7.4mt - 24ft
SFH940	9.1mt - 30ft
SFH1200	11.6mt - 38ft
SFH1500	15.3mt - 50ft





SUNFLOWER HEADER

DESIGNED TO HARVEST SPECIFIC ROW SPACES

NARDI SUNSTORM ROWS SFHR is the best choice for the gentle harvesting of fragile, damaged, or particularly dry sunflowers. The transmission is protected by disc clutches.

FEATURES



- *ROWS SYSTEM - FROM 2 TO 16 ROWS*
- *ROW SPACING UP TO 80cm*
- *ROW UNIT EQUIPPED WITH 2 GATHERING CHAINS COVERED BY WAVY RUBBER BELTS OR BLOCKS*
- *RIGID OR FOLDABLE FRAME*



CORN HEADER

RIGID OR FOLDABLE

NARDI MAIZESTORM corn header available with or without stalk chopper. It mounts plastic or iron hoods/bonnets.

Main feature: the transmission is entirely composed of gearboxes ensuring total compatibility and reliability with any combine harvester and type of irrigated/non-irrigated corn. The transmission is protected by disc clutches.

FEATURES

- FROM 4 TO 16 ROWS
- RIGID OR FOLDABLE FRAME
- ROW SPACING FROM 45cm TO 90cm
- PLASTIC BONNETS WITH METAL STEEL PLATES
- FULL GEARBOXES TRANSMISSION
- EACH ROW UNIT HAS ITS OWN CLUTCH
- STALK CHOPPER AVAILABLE





WINDROW PICKUP HEADER

HEADER TO COLLECT PRODUCTS CUTTED AND PLACED IN PATHWAYS


NARDI PICK UP is designed for harvesting swathed crops. It is equipped with a wide auger with retractable fingers along its entire width.

It mounts hydraulic belts with direct connection to the combine harvester or with a hydraulic pump powered by a PTO shaft.

Solid rubber front wheels. Transmission is protected by disc clutches.

FEATURES

PK 2.5	2.500 mm	2.815 mm	3.030 mm	800 kg
PK 3.0	3.000 mm	3.315 mm	3.480 mm	900 kg
PK 3.0	3.000 mm	3.040 mm	3.250 mm	900 kg
PK 3.5	3.500 mm	3.565 mm	3.780 mm	970 kg
PK 4.0	4.000 mm	4.330 mm	4.430 mm	1.050 kg
PK 5.0	5.000 mm	5.335 mm	5.475 mm	1.400 kg
PK 5.8	5.800 mm	6.100 mm	6.325 mm	1.600 kg

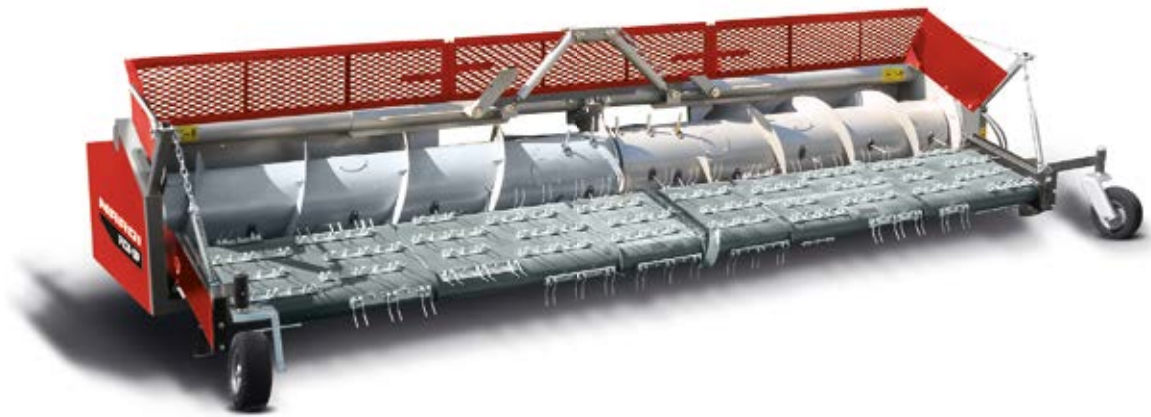

HEADER TRAILERS



NARDI TRAILERS ON YOUTUBE

NARDI TRAILERS

WIDE RANGE OF TRAILERS FOR HEADERS ROAD TRANSPORT

For over 40 years, NARDI has been producing a wide range of header trailers to carry headers from 4.5mt / 14.7ft up to 15mt / 50ft.

Nardi trailers boast European homologations and certifications that guarantee the top quality of the steels used and their 'Made in Italy' origin.

FEATURES

1-Axle



2-Axles
Front steering axle



2-Axles
Four steering wheels





- UNIVERSAL SUPPORTS (STANDARD)
- LED LIGHTS (STANDARD)
- INERTIAL BRAKE SYSTEM (OPTIONAL)





HEADER TRAILERS Technical Data




1-Axle Trailers	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
	15 - 20 ft 4,5 - 6,1 mt	2.000 kg	N40	Telescopic	1 Axle	No	IT-FR (40 km/h)
		2.000 kg	N40B	Telescopic	1-Tandem	No	No
	20 - 25 ft 6 - 7,6 mt	2.250 kg	N40BX	Telescopic	1-Tandem	No	EU (40 km/h)
		2.650 kg	N50BX	Telescopic	1-Tandem	No	EU (40 km/h)
		3.520 kg	N50BX Full brake	Telescopic	1-Tandem	Yes	EU (40 km/h)

	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
	15 - 20 ft 4,5 - 6 mt	2.940 kg	N30B	Telescopic- Revolving support	1-Tandem	No	IT-FR (40 km/h)
		2.520 kg	N20B		1-Tandem	No	EU (40 km/h)
	20 - 25 ft 6 - 7,6 mt	3.420 kg	N20B Full brake		1-Tandem	Yes	EU (40 km/h)

	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
	22 - 27 ft 6,7 - 8,4 mt	3.100 kg	N20T Full brake	Telescopic- Roll-off hydraulic revolving support	1-Tandem	Yes	IT - FR (40 km/h)

2-Axles Trailers Front steering axle	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
 Low-ride model Forage harvester header	15 - 20 ft 4,5 - 6,1 mt	3.750 kg	N50T/20	Fixed	2 st. wheels 4 st. wheels	No	No
		2.850 kg	N50T/20 Front brake			Front	EU (40 km/h)
		3.600 kg	N50T/20 Full brake			Front+Rear	EU (40 km/h)
	20 - 25 ft 6,1 - 7,6 mt	4.300 kg	N50T/25	Fixed		No	No
		2.500 kg	N50T/25 Front brake			Front	EU (40 km/h)
		4.200 kg	N50T/25 Full brake			Front+Rear	EU (40 km/h)

	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
	25 - 30 ft 7,6 - 9,1 mt	3.500 kg	N60/25	Fixed	2 st. wheels	No	No
		2.750 kg	N60/25 Front brake			Front	No
		4.170 kg	N60/30			No	No
		3.725 kg	N60/30 Front brake			Front	No
	35-40 ft 10,6-12,1 mt	4.400 kg	N60/35	Fixed		No	No
		3.700 kg	N60/35 Front brake			Front	No
		5.800 kg	N60/40			No	No
		4.350 kg	N60/40 Front brake			Front	No

2-Axles Trailers Four steering wheels	HEADER WIDTH	HEADER WEIGHT (MAX)	MODEL	FRAME TYPE	NR-AXLE MODEL	OVERRUN BRAKE (AXLE)	HOMOLOGATION
	25 - 30 ft 7,6 - 9,1 mt	4.500 kg	N70/30	Fixed	4 st. wheels	No	No
		2.400 kg	N70/30 Front brake			Front	EU (40 km/h)
		4.350 kg	N70/30 Full brake			Front+Rear	EU (40 km/h)
	35 - 40 ft 10,6 - 12,1 mt	5.950 kg	N70/40	Fixed		No	No
		5.750 kg	N70/40 Full brake			Front+Rear	EU (40 km/h)
	45 - 50 ft 13,7 - 15,2 mt	5.500 kg	N70/50	Fixed		No	No
			N70/50 Full brake			Front+Rear	No

NARDI S.R.L.

Viale dell'Industria 30/A, 37040, Veronella, Verona, Italy

VAT: IT02692480235

SDI: W7YVJK9

Ph: +39 045 7665 570

info@nardi-harvesting.com

www.nardi-harvesting.com

Nardi on Youtube

