



FERTILIZER SPREADER



Professional product range



High performance for professionals

MAXI PRO

Twin disc centrifugal spreader

Working width from 12 to 36* m

* with set of discs and vanes for 36 m working width




MEC



ISOBUS


The **MAXI PRO** spreader is suitable for the distribution of chemical and organic fertilizers in granular, pelleted, and powdered forms.

The **MAXI PRO** has a maximum working width of up to 36m. The hopper is fully made of stainless steel with a capacity of 4 and 5.5 m³. It is available in a mechanical version with a DPA system and in two ISOBUS versions: the SUPER PROFY version with mechanical transmission of the distribution discs and capable of controlling up to 16 working sections; it is the DYNAMIC version that allows the **MAXI PRO** to achieve maximum precision, as it is capable of controlling up to 32 working sections with independent hydraulic transmission of the distribution discs.

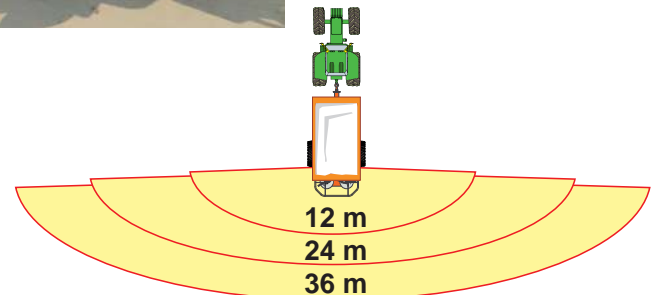

Working width: **28 m**
Fertilizer: Ammonium phosphate 18-49

Variation coefficient: 9,8
Quantity: 311 kg/ha

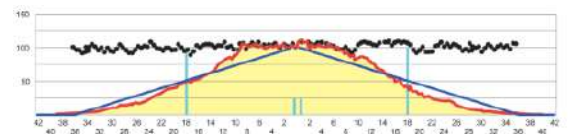

Hydraulic disc drive



Double acting hydraulic control of fertilizer flo



Double hydraulic flow regulator



Mobile focuser for edge spreading

Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Tractor Power (HP)
MAXI PRO 4000	4	6150	2140	550	245	285	110
MAXI PRO 6000	6	6150	2180	550	245	300	110

All models are equipped with: Manual flow regulation – Hydraulic opening/closing of fertilizer flow – Standard filtering grids – PTO shaft – 420/85 R 38 tires – Stainless steel spreading discs – LONG LIFE vanes – Inspection ladder

MAXI PRO

Twin disc centrifugal spreader

Working width from 12 to 36* m

* with set of discs and vanes for 36 m working width



- Weighing System
- Double electric control of dosing gates

WI - ISOBUS



Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Tractor Power (HP)
MAXI PRO 8000	8	10000	3500	785	272	300	160÷180
MAXI PRO 10000	10	10000	3600	785	272	315	160÷180
MAXI PRO 12000	12	10000	3700	785	272	330	160÷180

KALKO

Lime and fertilizer spreader

**Working width: lime up to 16 meters,
fertilizer up to 24 meters (-)**

(-) with discs and vanes for spreading fertilizer 12-24 m



Model with spreading discs up to 16 meters

Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Tractor Power (HP)
KALKO 10000 D ⁽¹⁾	9,5	20000	5450	764	284	277	150
KALKO 10000 D ISO ⁽²⁾	9,5	20000	5450	764	284	277	150



**Model with spreading discs up to 16 m
and spreading augers up to 12 m**

Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Tractor Power (HP)
KALKO 10000 DC ⁽³⁾	9,5	20000	5750	764	284	277	150